

Scale: 1 inch= 8.00 Ft.

LIGHTING DETAILS:

Luminaire Schedule						
Label	Symbol	Qty	LLF	Description	Arrangement	Arrangement Luminaire Lumens
F1		4	1.000	500 Watt NextGen III	Single	62734

Calculation Summary						
Label	CalcType	Units	Avg	Max	Min	Grid Z
PAD_Top_1	Illuminance	Fc	25.32	38.5	15.0	-0.1
Tennis Court_1_ Surface_1	Illuminance	Fc	32.85	38.0	28.0	0
Tennis Court_Surface_1	Illuminance	Fc	32.85	38.0	28.0	0

DESIGN NOTES:

1. NextGen 500W
2. 20' pole
3. Tenon top pole for slip fit mount
4. Full cutoff optics

Note on this Design:
This report makes no representations in regard to Lighting Design or Specification, rather it attempts to accurately reflect the photometric results of a design, as approved by others.

This analysis is a mathematical model and can be only as accurate as is permitted by the third-party software and the IES standards used. All digital CAD data appear to be accurate, however, this apparent accuracy is an artifact of the techniques used to generate it and is in no way intended to imply accuracy in the real world.

There are many factors that will impact the actual performance of Lighting in the constructed space, including: the accuracy of the original source (.ies) files supplied by the manufacturer, input voltage ballast variances, actual finish values in the constructed environment, manufacturing variations in both the source (lamp) and the luminaire, final luminaire placement, obstructions, and installation quality. Further, field measurement itself is subject to errors arising from measuring methods and/or technology selected, and the knowledge/ability of the measuring party. While the creator of this lighting study makes every effort to ensure accuracy, they cannot be held liable for any errors. The recipient of this lighting study understands and accepts that the likelihood of scaling error increases when no .DWG file or other properly-dimensioned drawing is provided to the designer.

Reflective Values have a significant effect on light levels, the end-user of the document should confirm these values before accepting the results of any photometric report. The managing contractor/ architect/engineer is responsible for ensuring compliance to all relevant lighting ordinance(s) and energy codes required on this project.

SPEC SHEET & RENDERS

TYPE F1

500W NextGen III | LED PARKING LOT LIGHT

PRODUCT DESCRIPTION
The Top Rated NextGen Series Gets Better! The NextGen III Series has 1400 Lumens per Watt, higher VF driver and is DLC E-3 Premium Rated! New pop open Compartment for full access and optional easy install Motion Sensor that can be programmed by a remote.

PRODUCT FEATURES & COMMON USE APPLICATIONS

- UL, cUL, DLC-VIS (Premium) certification
- Bridgeless Chip, high CRI
- Input voltage 120-277VAC
- Output constant current level can be adjusted through output cable with 0-10V
- No UV or IR in the beam
- Easy to install and operate
- Energy saving, long lifespan
- Light is soft and uniform, safe to eyes
- Instant start, No Flicker, No humming
- Green and eco-friendly without mercury

PRODUCT DIMENSIONS

500W NextGen III | LED PARKING LOT LIGHT

PRODUCT TECHNICAL SPECIFICATIONS


Input Power (Reference - 1.00%)	100W(400/300/200 Watt/Voltage Selection)
Color Temperature	5000K
Color Rendering Index (CRI)	90 CRI (95 CRI 5000K/3000K/2000K Luminaire)
Efficiency (Reference - 3%)	135-140lm/W
Color Consistency	<7 SDCM for <7 1000lm
Beam Spread	80-90°/50°
Diffuser Type	Type III
Beam Angle (90°) (Reference)	140-150 degrees
Input Voltage and Frequency	120-277VAC, 50/60Hz
Warranty	5Yr
RoHS (Reference - 3%)	RoHS
THD (Reference - <5%)	<20%
Flicker Percent	<5%
Driver Brand	Siemens VIP series
Driver Model	Siemens VIP series
Driver Surge protection	UL 98, 100, 105, 108, 44V
Shielding	0.35% Straylight (Standard)
Optional Accessory	Photochromatic, Surge protection Device, DC Motion Microwave sensor, DC Motion/PIR sensor, photocell receptacle, shorting cap

MATERIALS
 LED Brand: Bridgelux
 LED Type: SMD3030
 Housing: Die cast Aluminum
 Finishing Color: Brown, Black, or Customized
 Waterproof Rating: IP67 (IP65)
 Operating Temperature: -40°C to 60°C
 Storage Temperature: -20°C to 70°C
 Storage Humidity: 20% to 90% RH
 Storage Humidity: 20% to 90% RH
 Warranty: 5 year warranty with 24/7 operating hours Luminaire lifetime and labor cost


RuggedGrade Straight Square Steel Light Poles, 4" and 5"

The Straight Square Steel poles are built from high strength steel pipe and are available with or without a cross member. They are designed to meet the requirements of the American Institute of Steel Construction, Inc. (AISC) Specification for Structural Steel Buildings. The poles are available in 4" and 5" diameters. The poles are available in 20' and 25' heights. The poles are available in 10' and 15' spacing. The poles are available in 10' and 15' spacing. The poles are available in 10' and 15' spacing.

Specifications and Features: Pole
 Material: A500 Grade B Steel
 Finish: Galvalume
 Ancher Bolt: 1/2" Dia. x 6" Long
 Head Hole: 1/2" Dia. x 6" Long
 Base Cover: 1/2" Dia. x 6" Long
 Pole Length: 20' or 25'
 Pole Spacing: 10' or 15'
 Mounting Options: 10' or 15' Spacing
 Contact Information: 888-953-2476 or Sales@RuggedGrade.com

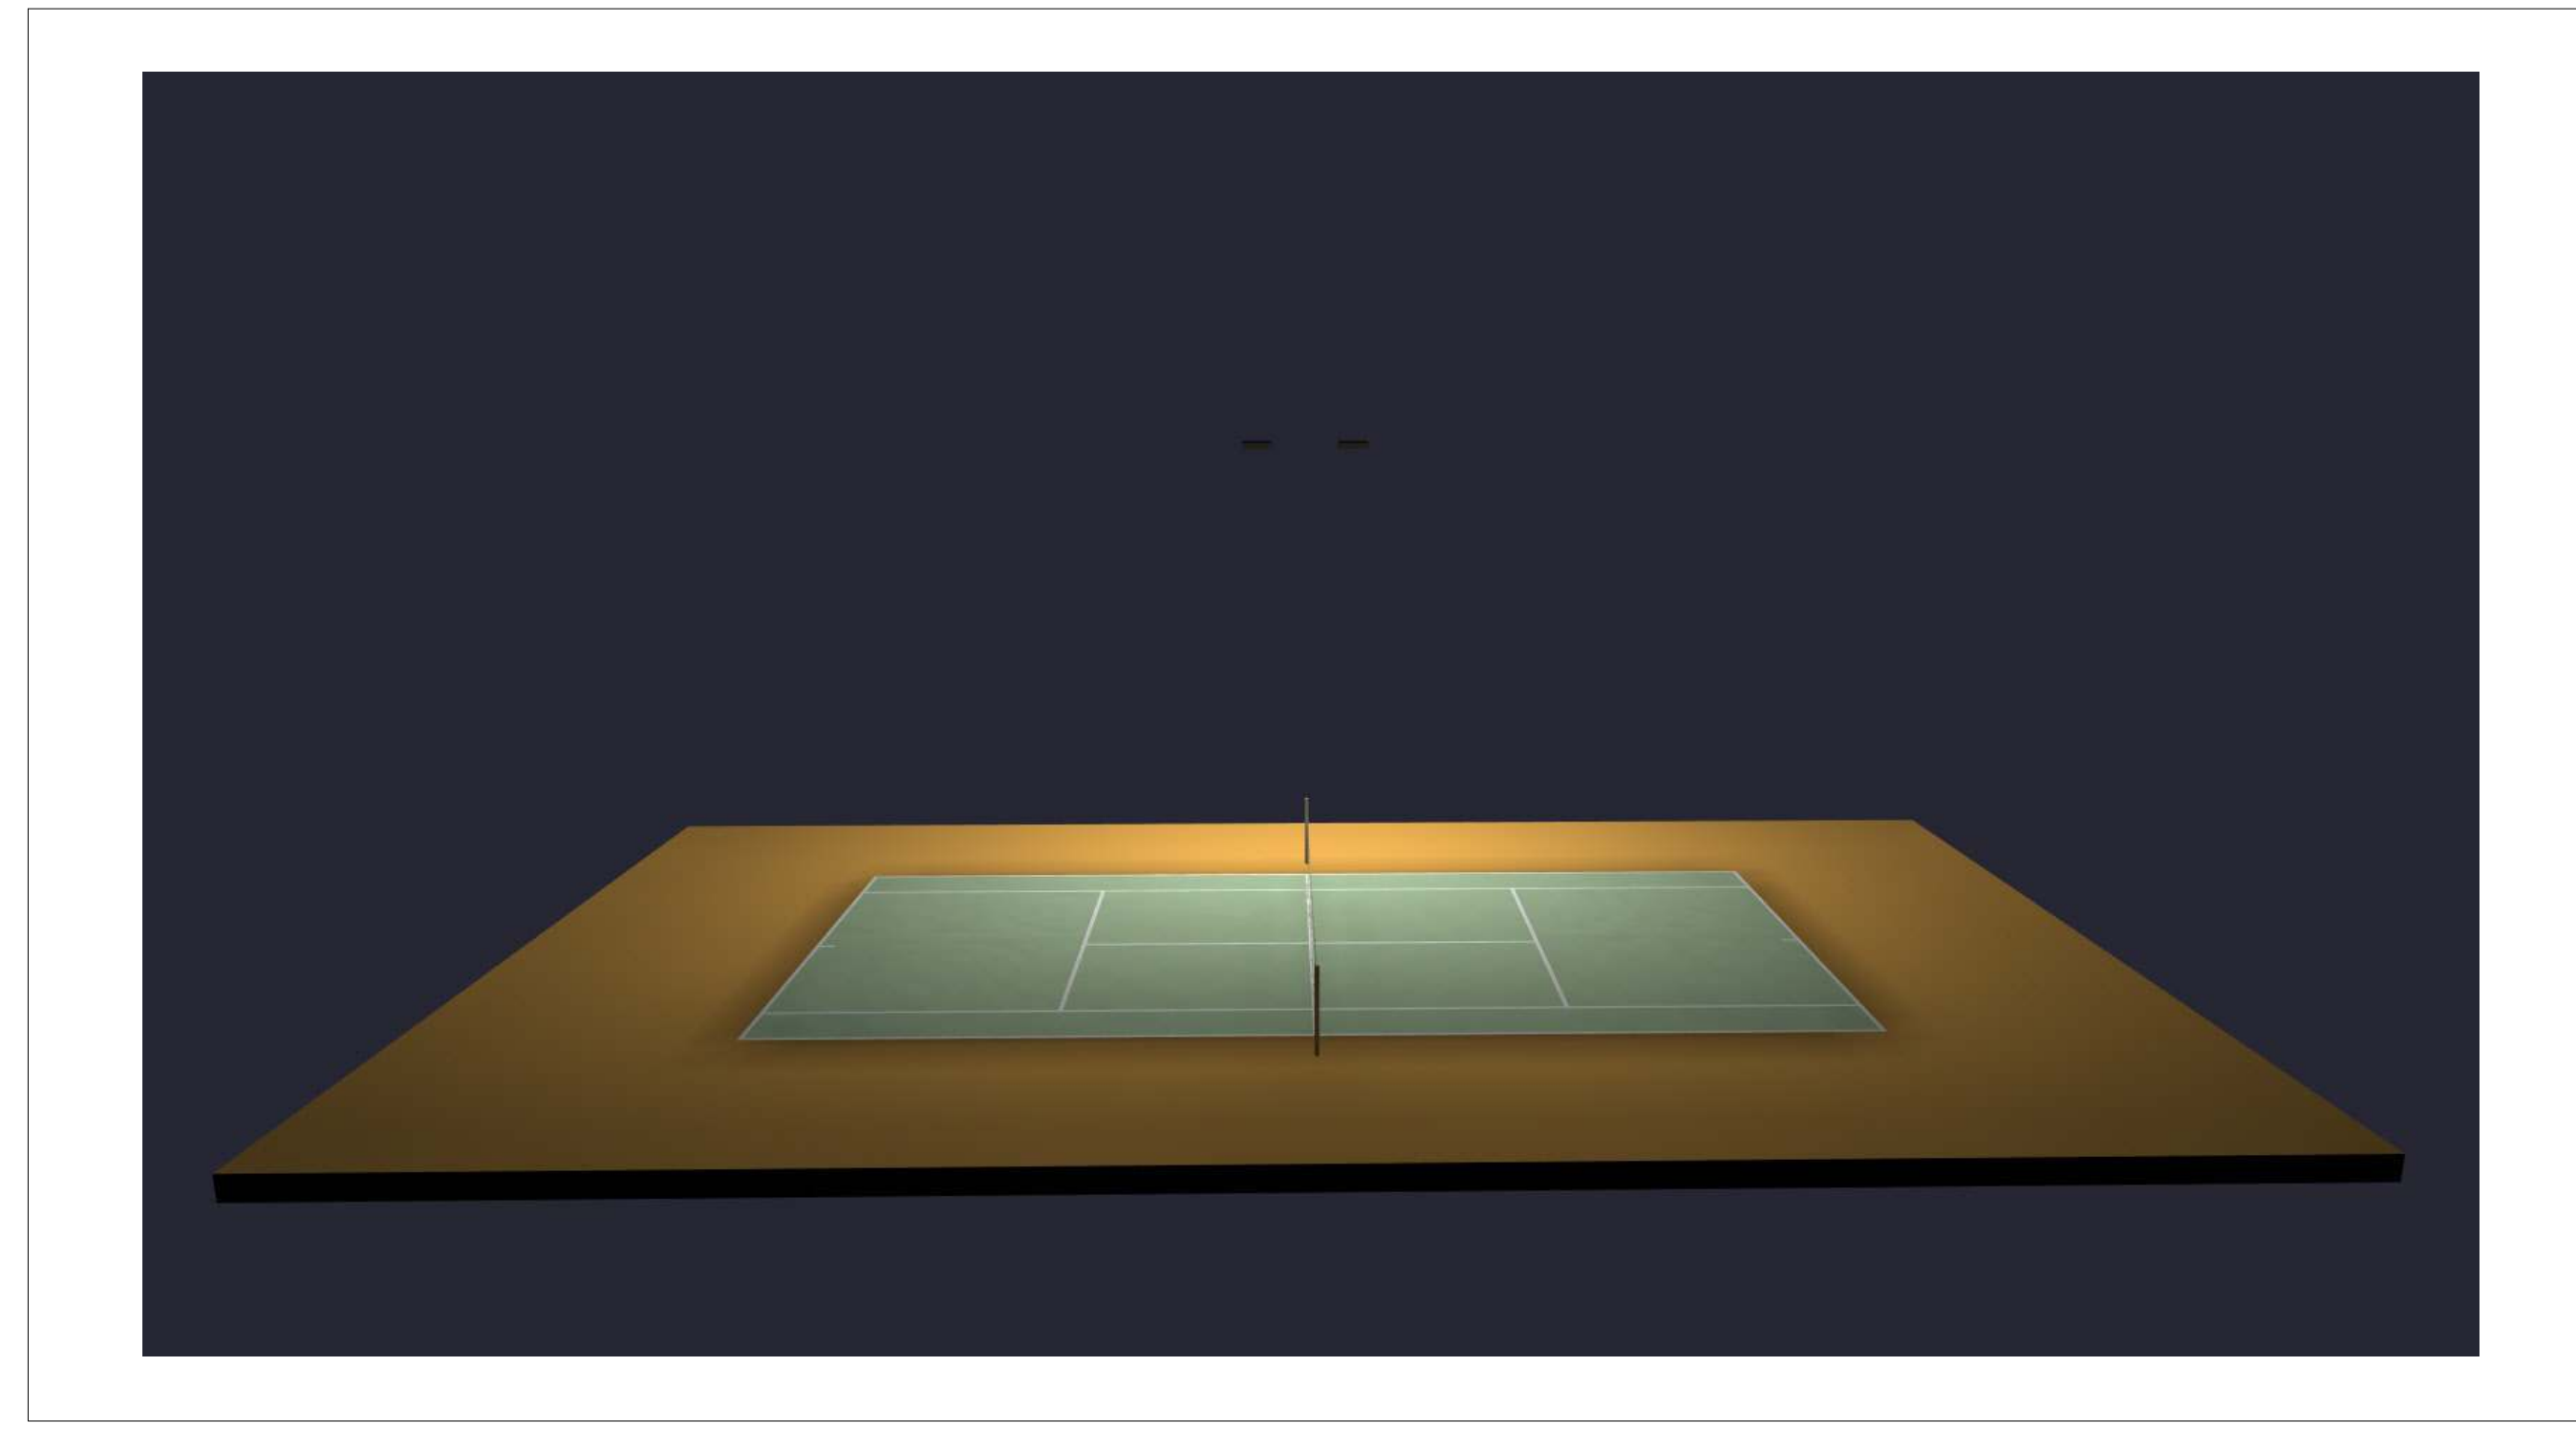

RENDERING

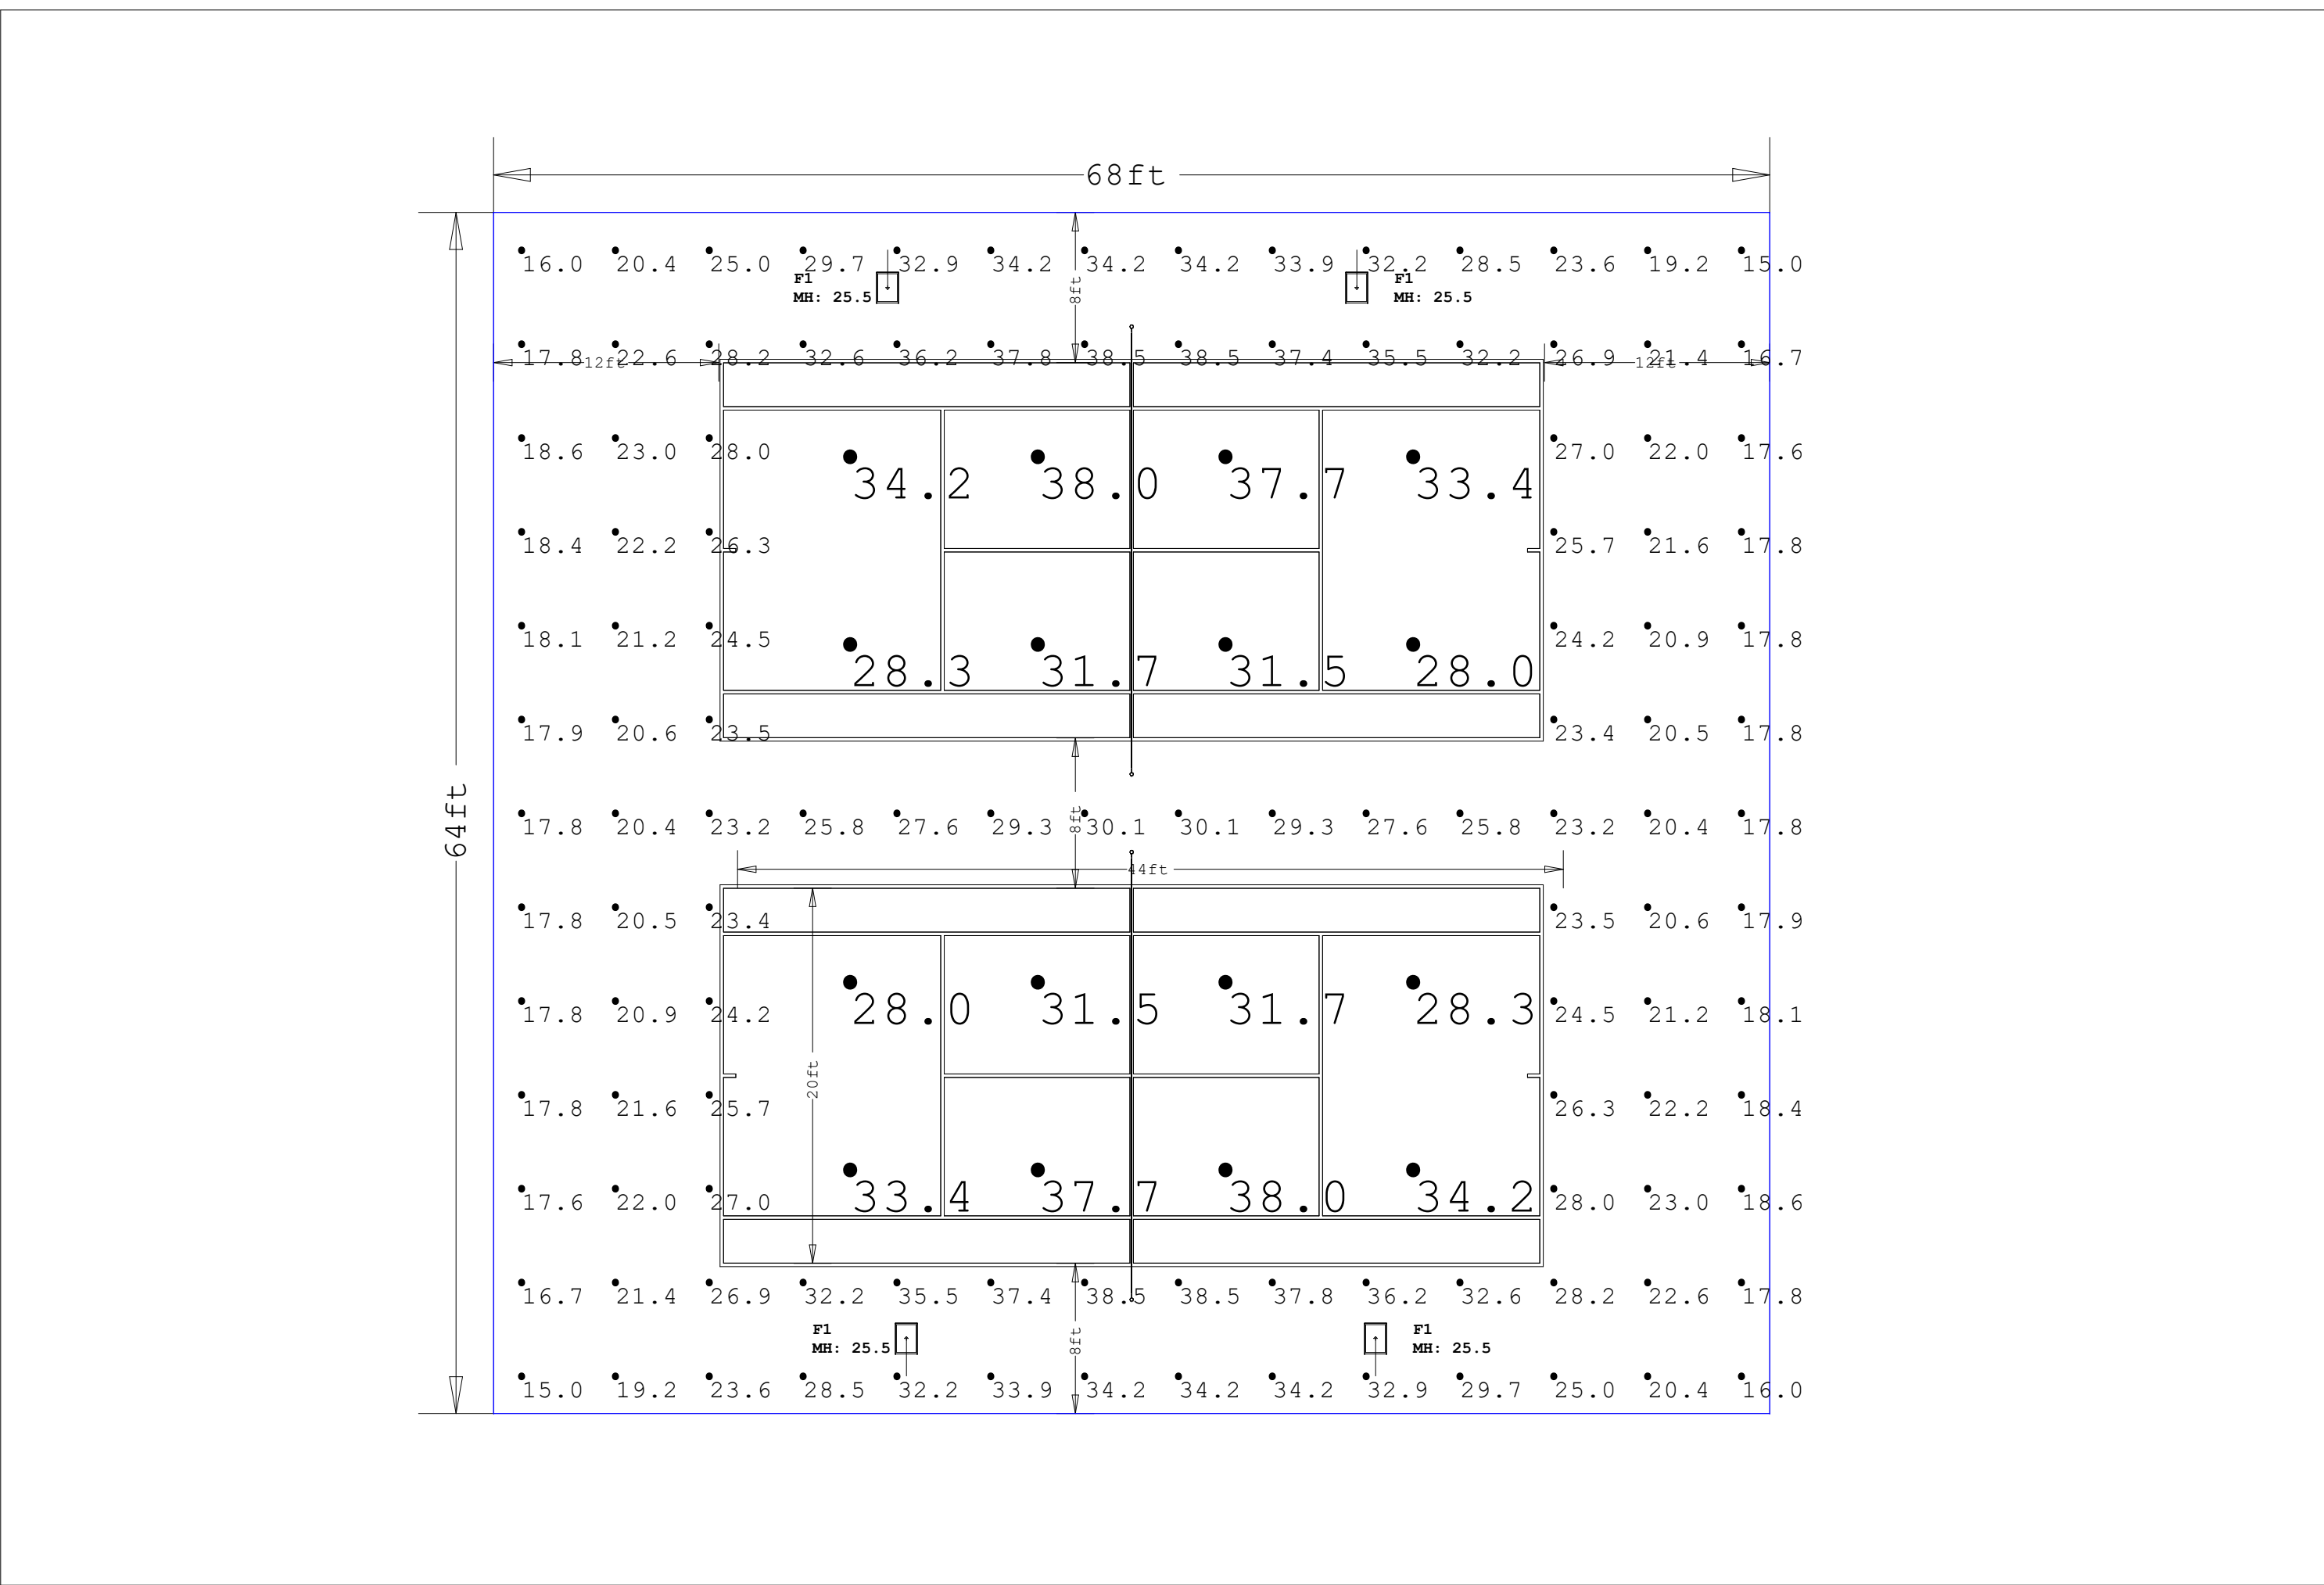

Scale: 1 inch= 8.00 Ft.

LIGHTING DETAILS:

Luminaire Schedule						
Label	Symbol	Qty	LLF	Description	Arrangement	Arrangement Luminaire Lumens
F1		4	1.000	500 Watt NextGen III	Single	62734

Calculation Summary						
Label	CalcType	Units	Avg	Max	Min	Grid Z
PAD_Top_1	Illuminance	Fc	25.32	38.5	15.0	-0.1
Tennis Court_1_ Surface_1	Illuminance	Fc	32.85	38.0	28.0	0
Tennis Court_Surface_1	Illuminance	Fc	32.85	38.0	28.0	0

DESIGN NOTES:

- NextGen 500W
- 20' pole
- Tenon top pole for slip fit mount
- Full cutoff optics

Note on this Design:
 This report makes no representations in regard to Lighting Design or Specification, rather it attempts to accurately reflect the photometric results of a design, as approved by others.

This analysis is a mathematical model and can be only as accurate as is permitted by the third-party software and the IES standards used. All digital CAD data appear to be accurate, however, this apparent accuracy is an artifact of the techniques used to generate it and is in no way intended to imply accuracy in the real world.

There are many factors that will impact the actual performance of Lighting in the constructed space, including: the accuracy of the original source (.ies) files supplied by the manufacturer, input voltage ballast variances, actual finish values in the constructed environment, manufacturing variations in both the source (lamp) and the luminaire, final luminaire placement, obstructions, and installation quality. Further, field measurement itself is subject to errors arising from measuring methods and/or technology selected, and the knowledge/ability of the measuring party. While the creator of this lighting study makes every effort to ensure accuracy, they cannot be held liable for any errors. The recipient of this lighting study understands and accepts that the likelihood of scaling error increases when no .DWG file or other properly-dimensioned drawing is provided to the designer.

Reflective Values have a significant effect on light levels, the end-user of the document should confirm these values before accepting the results of any photometric report. The managing contractor/ architect/engineer is responsible for ensuring compliance to all relevant lighting ordinance(s) and energy codes required on this project.

SPEC SHEET & RENDERS

TYPE F1

500W NextGen III | LED PARKING LOT LIGHT

PRODUCT DESCRIPTION
 The Top Rated NextGen Series Gets Better! The NextGen III Series has 1400 Lumens per Watt, higher VF driver and is DLC E-3 Premium Rated! New pop open Compartment for full access and optional easy install Motion Sensor that can be programmed by a remote.

PRODUCT FEATURES & COMMON USE APPLICATIONS
 • UL, cUL, DLC (V5 Premium) certification
 • Bridgeway Chip, high CRI
 • Input voltage 120-277VAC
 • Output constant current level can be adjusted through remote control with 0-100%
 • No UV or IR in the beam
 • Easy to install and operate
 • Energy saving, long lifespan
 • Light is soft and uniform, safe to eyes
 • Instant start, No Flickering, No humming
 • Green and eco-friendly without mercury

PRODUCT DIMENSIONS

500W NextGen III | LED PARKING LOT LIGHT


PRODUCT TECHNICAL SPECIFICATIONS

Input Power (Reference - 1.00%)	100W(400/300/200 Watt/Voltage Selection)
Color Temperature	5000K
Color Rendering Index (CRI)	90 CRI (95 CRI available)
Efficiency (Reference - 3%)	135-140lm/W
Beam Angle	70°
Color Consistency	<7 Stage for <7 SDCM
Beam Type	Beam Type
Beam Diameter	1.8m @ 30m
Beam Height (30m) (Reference)	140°/150° degrees
Input Voltage and Frequency	120-277VAC, 50/60Hz
VF (Reference - 3%)	20V
THD (THDmax < 5%)	<20%
Flicker Percent	<5%
Driver Brand	Siemens VFD series
Driver Model	Siemens VFD series
Driver Surge protection	UL 98, 99, 100, 101, 102, 103, 104, 105, 106, 107, 108, 109, 110, 111, 112, 113, 114, 115, 116, 117, 118, 119, 120, 121, 122, 123, 124, 125, 126, 127, 128, 129, 130, 131, 132, 133, 134, 135, 136, 137, 138, 139, 140, 141, 142, 143, 144, 145, 146, 147, 148, 149, 150, 151, 152, 153, 154, 155, 156, 157, 158, 159, 160, 161, 162, 163, 164, 165, 166, 167, 168, 169, 170, 171, 172, 173, 174, 175, 176, 177, 178, 179, 180, 181, 182, 183, 184, 185, 186, 187, 188, 189, 190, 191, 192, 193, 194, 195, 196, 197, 198, 199, 200, 201, 202, 203, 204, 205, 206, 207, 208, 209, 210, 211, 212, 213, 214, 215, 216, 217, 218, 219, 220, 221, 222, 223, 224, 225, 226, 227, 228, 229, 230, 231, 232, 233, 234, 235, 236, 237, 238, 239, 240, 241, 242, 243, 244, 245, 246, 247, 248, 249, 250, 251, 252, 253, 254, 255, 256, 257, 258, 259, 260, 261, 262, 263, 264, 265, 266, 267, 268, 269, 270, 271, 272, 273, 274, 275, 276, 277, 278, 279, 280, 281, 282, 283, 284, 285, 286, 287, 288, 289, 290, 291, 292, 293, 294, 295, 296, 297, 298, 299, 300, 301, 302, 303, 304, 305, 306, 307, 308, 309, 310, 311, 312, 313, 314, 315, 316, 317, 318, 319, 320, 321, 322, 323, 324, 325, 326, 327, 328, 329, 330, 331, 332, 333, 334, 335, 336, 337, 338, 339, 340, 341, 342, 343, 344, 345, 346, 347, 348, 349, 350, 351, 352, 353, 354, 355, 356, 357, 358, 359, 360, 361, 362, 363, 364, 365, 366, 367, 368, 369, 370, 371, 372, 373, 374, 375, 376, 377, 378, 379, 380, 381, 382, 383, 384, 385, 386, 387, 388, 389, 390, 391, 392, 393, 394, 395, 396, 397, 398, 399, 400, 401, 402, 403, 404, 405, 406, 407, 408, 409, 410, 411, 412, 413, 414, 415, 416, 417, 418, 419, 420, 421, 422, 423, 424, 425, 426, 427, 428, 429, 430, 431, 432, 433, 434, 435, 436, 437, 438, 439, 440, 441, 442, 443, 444, 445, 446, 447, 448, 449, 450, 451, 452, 453, 454, 455, 456, 457, 458, 459, 460, 461, 462, 463, 464, 465, 466, 467, 468, 469, 470, 471, 472, 473, 474, 475, 476, 477, 478, 479, 480, 481, 482, 483, 484, 485, 486, 487, 488, 489, 490, 491, 492, 493, 494, 495, 496, 497, 498, 499, 500, 501, 502, 503, 504, 505, 506, 507, 508, 509, 510, 511, 512, 513, 514, 515, 516, 517, 518, 519, 520, 521, 522, 523, 524, 525, 526, 527, 528, 529, 530, 531, 532, 533, 534, 535, 536, 537, 538, 539, 540, 541, 542, 543, 544, 545, 546, 547, 548, 549, 550, 551, 552, 553, 554, 555, 556, 557, 558, 559, 560, 561, 562, 563, 564, 565, 566, 567, 568, 569, 570, 571, 572, 573, 574, 575, 576, 577, 578, 579, 580, 581, 582, 583, 584, 585, 586, 587, 588, 589, 590, 591, 592, 593, 594, 595, 596, 597, 598, 599, 600, 601, 602, 603, 604, 605, 606, 607, 608, 609, 610, 611, 612, 613, 614, 615, 616, 617, 618, 619, 620, 621, 622, 623, 624, 625, 626, 627, 628, 629, 630, 631, 632, 633, 634, 635, 636, 637, 638, 639, 640, 641, 642, 643, 644, 645, 646, 647, 648, 649, 650, 651, 652, 653, 654, 655, 656, 657, 658, 659, 660, 661, 662, 663, 664, 665, 666, 667, 668, 669, 670, 671, 672, 673, 674, 675, 676, 677, 678, 679, 680, 681, 682, 683, 684, 685, 686, 687, 688, 689, 690, 691, 692, 693, 694, 695, 696, 697, 698, 699, 700, 701, 702, 703, 704, 705, 706, 707, 708, 709, 710, 711, 712, 713, 714, 715, 716, 717, 718, 719, 720, 721, 722, 723, 724, 725, 726, 727, 728, 729, 730, 731, 732, 733, 734, 735, 736, 737, 738, 739, 740, 741, 742, 743, 744, 745, 746, 747, 748, 749, 750, 751, 752, 753, 754, 755, 756, 757, 758, 759, 760, 761, 762, 763, 764, 765, 766, 767, 768, 769, 770, 771, 772, 773, 774, 775, 776, 777, 778, 779, 780, 781, 782, 783, 784, 785, 786, 787, 788, 789, 790, 791, 792, 793, 794, 795, 796, 797, 798, 799, 800, 801, 802, 803, 804, 805, 806, 807, 808, 809, 810, 811, 812, 813, 814, 815, 816, 817, 818, 819, 820, 821, 822, 823, 824, 825, 826, 827, 828, 829, 830, 831, 832, 833, 834, 835, 836, 837, 838, 839, 840, 841, 842, 843, 844, 845, 846, 847, 848, 849, 850, 851, 852, 853, 854, 855, 856, 857, 858, 859, 860, 861, 862, 863, 864, 865, 866, 867, 868, 869, 870, 871, 872, 873, 874, 875, 876, 877, 878, 879, 880, 881, 882, 883, 884, 885, 886, 887, 888, 889, 890, 891, 892, 893, 894, 895, 896, 897, 898, 899, 900, 901, 902, 903, 904, 905, 906, 907, 908, 909, 910, 911, 912, 913, 914, 915, 916, 917, 918, 919, 920, 921, 922, 923, 924, 925, 926, 927, 928, 929, 930, 931, 932, 933, 934, 935, 936, 937, 938, 939, 940, 941, 942, 943, 944, 945, 946, 947, 948, 949, 950, 951, 952, 953, 954, 955, 956, 957, 958, 959, 960, 961, 962, 963, 964, 965, 966, 967, 968, 969, 970, 971, 972, 973, 974, 975, 976, 977, 978, 979, 980, 981, 982, 983, 984, 985, 986, 987, 988, 989, 990, 991, 992, 993, 994, 995, 996, 997, 998, 999, 1000


500W NextGen III | LED PARKING LOT LIGHT

PRODUCT TECHNICAL SPECIFICATIONS

Input Power (Reference - 1.00%)	100W(400/300/200 Watt/Voltage Selection)
Color Temperature	5000K
Color Rendering Index (CRI)	90 CRI (95 CRI available)
Efficiency (Reference - 3%)	135-140lm/W
Beam Angle	70°
Color Consistency	<7 Stage for <7 SDCM
Beam Type	Beam Type
Beam Diameter	1.8m @ 30m
Beam Height (30m) (Reference)	140°/150° degrees
Input Voltage and Frequency	120-277VAC, 50/60Hz
VF (Reference - 3%)	20V
THD (THDmax < 5%)	<20%
Flicker Percent	<5%
Driver Brand	Siemens VFD series
Driver Model	Siemens VFD series
Driver Surge protection	UL 98, 99, 100, 101, 102, 103, 104, 105, 106, 107, 108, 109, 110, 111, 112, 113, 114, 115, 116, 117, 118, 119, 120, 121, 122, 123, 124, 125, 126, 127, 128, 129, 130, 131, 132, 133, 134, 135, 136, 137, 138, 139, 140, 141, 142, 143, 144, 145, 146, 147, 148, 149, 150, 151, 152, 153, 154, 155, 156, 157, 158, 159, 160, 161, 162, 163, 164, 165, 166, 167, 168, 169, 170, 171, 172, 173, 174, 175, 176, 177, 178, 179, 180, 181, 182, 183, 184, 185, 186, 187, 188, 189, 190, 191, 192, 193, 194, 195, 196, 197, 198, 199, 200, 201, 202, 203, 204, 205, 206, 207, 208, 209, 210, 211, 212, 213, 214, 215, 216, 217, 218, 219, 220, 221, 222, 223, 224, 225, 226, 227, 228, 229, 230, 231, 232, 233, 234, 235, 236, 237, 238, 239, 240, 241, 242, 243, 244, 245, 246, 247, 248, 249, 250, 251, 252, 253, 254, 255, 256, 257, 258, 259, 260, 261, 262, 263, 264, 265, 266, 267, 268, 269, 270, 271, 272, 273, 274, 275, 276, 277, 278, 279, 280, 281, 282, 283, 284, 285, 286, 287, 288, 289, 290, 291, 292, 293, 294, 295, 296, 297, 298, 299, 300, 301, 302, 303, 304, 305, 306, 307, 308, 309, 310, 311, 312, 313, 314, 315, 316, 317, 318, 319, 320, 321, 322, 323, 324, 325, 326, 327, 328, 329, 330, 331, 332, 333, 334, 335, 336, 337, 338, 339, 340, 341, 342, 343, 344, 345, 346, 347, 348, 349, 350, 351, 352, 353, 354, 355, 356, 357, 358, 359, 360, 361, 362, 363, 364, 365, 366, 367, 368, 369, 370, 371, 372, 373, 374, 375, 376, 377, 378, 379, 380, 381, 382, 383, 384, 385, 386, 387, 388, 389, 390, 391, 392, 393, 394, 395, 396, 397, 398, 399, 400, 401, 402, 403, 404, 405, 406, 407, 408, 409, 410, 411, 412, 413, 414, 415, 416, 417, 418, 419, 420, 421, 422, 423, 424, 425, 426, 427, 428, 429, 430, 431, 432, 433, 434, 435, 436, 437, 438, 439, 440, 441, 442, 443, 444, 445, 446, 447, 448, 449, 450, 451, 452, 453, 454, 455, 456, 457, 458, 459, 460, 461, 462, 463, 464, 465, 466, 467, 468, 469, 470, 471, 472, 473, 474, 475, 476, 477, 478, 479, 480, 481, 482, 483, 484, 485, 486, 487, 488, 489, 490, 491, 492, 493, 494, 495, 496, 497, 498, 499, 500, 501, 502, 503, 504, 505, 506, 507, 508, 509, 510, 511, 512, 513, 514, 515, 516, 517, 518, 519, 520, 521, 522, 523, 524, 525, 526, 527, 528, 529, 530, 531, 532, 533, 534, 535, 536, 537, 538, 539, 540, 541, 542, 543, 544, 545, 546, 547, 548, 549, 550, 551, 552, 553, 554, 555, 556, 557, 558, 559, 560, 561, 562, 563, 564, 565, 566, 567, 568, 569, 570, 571, 572, 573, 574, 575, 576, 577, 578, 579, 580, 581, 582, 583, 584, 585, 586, 587, 588, 589, 590, 591, 592, 593, 594, 595, 596, 597, 598, 599, 600, 601, 602, 603, 604, 605, 606, 607, 608, 609, 610, 611, 612, 613, 614, 615, 616, 617, 618, 619, 620, 621, 622, 623, 624, 625, 626, 627, 628, 629, 630, 631, 632, 633, 634, 635, 636, 637, 638, 639, 640, 641, 642, 643, 644, 645, 646, 647, 648, 649, 650, 651, 652, 653, 654, 655, 656, 657, 658, 659, 660, 661, 662, 663, 664, 665, 666, 667, 668, 669, 670, 671, 672, 673, 674, 675, 676, 677, 678, 679, 680, 681, 682, 683, 684, 685, 686, 687, 688, 689, 690, 691, 692, 693, 694, 695, 696, 697, 698, 699, 700, 701, 702, 703, 704, 705, 706, 707, 708, 709, 710, 711, 712, 713, 714, 715, 716, 717, 718, 719, 720, 721, 722, 723, 724, 725, 726, 727, 728, 729, 730, 731, 732, 733, 734, 735, 736, 737, 738, 739, 740, 741, 742, 743, 744, 745, 746, 747, 748, 749, 750, 751, 752, 753, 754, 755, 756, 757, 758, 759, 760, 761, 762, 763, 764, 765, 766, 767, 768, 769, 770, 771, 772, 773, 774, 775, 776, 777, 778, 779, 780, 781, 782, 783, 784, 785, 786, 787, 788, 789, 790, 791, 792, 793, 794, 795, 796, 797, 798, 799, 800, 801, 802, 803, 804, 805, 806, 807, 808, 809, 810, 811, 812, 813, 814, 815, 816, 817, 818, 819, 820, 821, 822, 823, 824, 825, 826, 827, 828, 829, 830, 831, 832, 833, 834, 835, 836, 837, 838, 839, 840, 841, 842, 843, 844, 845, 846, 847, 848, 849, 850, 851, 852, 853, 854, 855, 856, 857, 858, 859, 860, 861, 862, 863, 864, 865, 866, 867, 868, 869, 870, 871, 872, 873, 874, 875, 876, 877, 878, 879, 880, 881, 882, 883, 884, 885, 886, 887, 888, 889, 890, 891, 892, 893, 894, 895, 896, 897, 898, 899, 900, 901, 902, 903, 904, 905, 906, 907, 908, 909, 910, 911, 912, 913, 914, 915, 916, 917, 918, 919, 920, 921, 922, 923, 924, 925, 926, 927, 928, 929, 930, 931, 932, 933, 934, 935, 936, 937, 938, 939, 940, 941, 942, 943, 944, 945, 946, 947, 948, 949, 950, 951, 952, 953, 954, 955, 956, 957, 958, 959, 960, 961, 962, 963, 964, 965, 966, 967, 968, 969, 970, 971, 972, 973, 974, 975, 976, 977, 978, 979, 980, 981, 982, 983, 984, 985, 986, 987, 988, 989, 990, 991, 992, 993, 994, 995, 996, 997, 998, 999, 1000

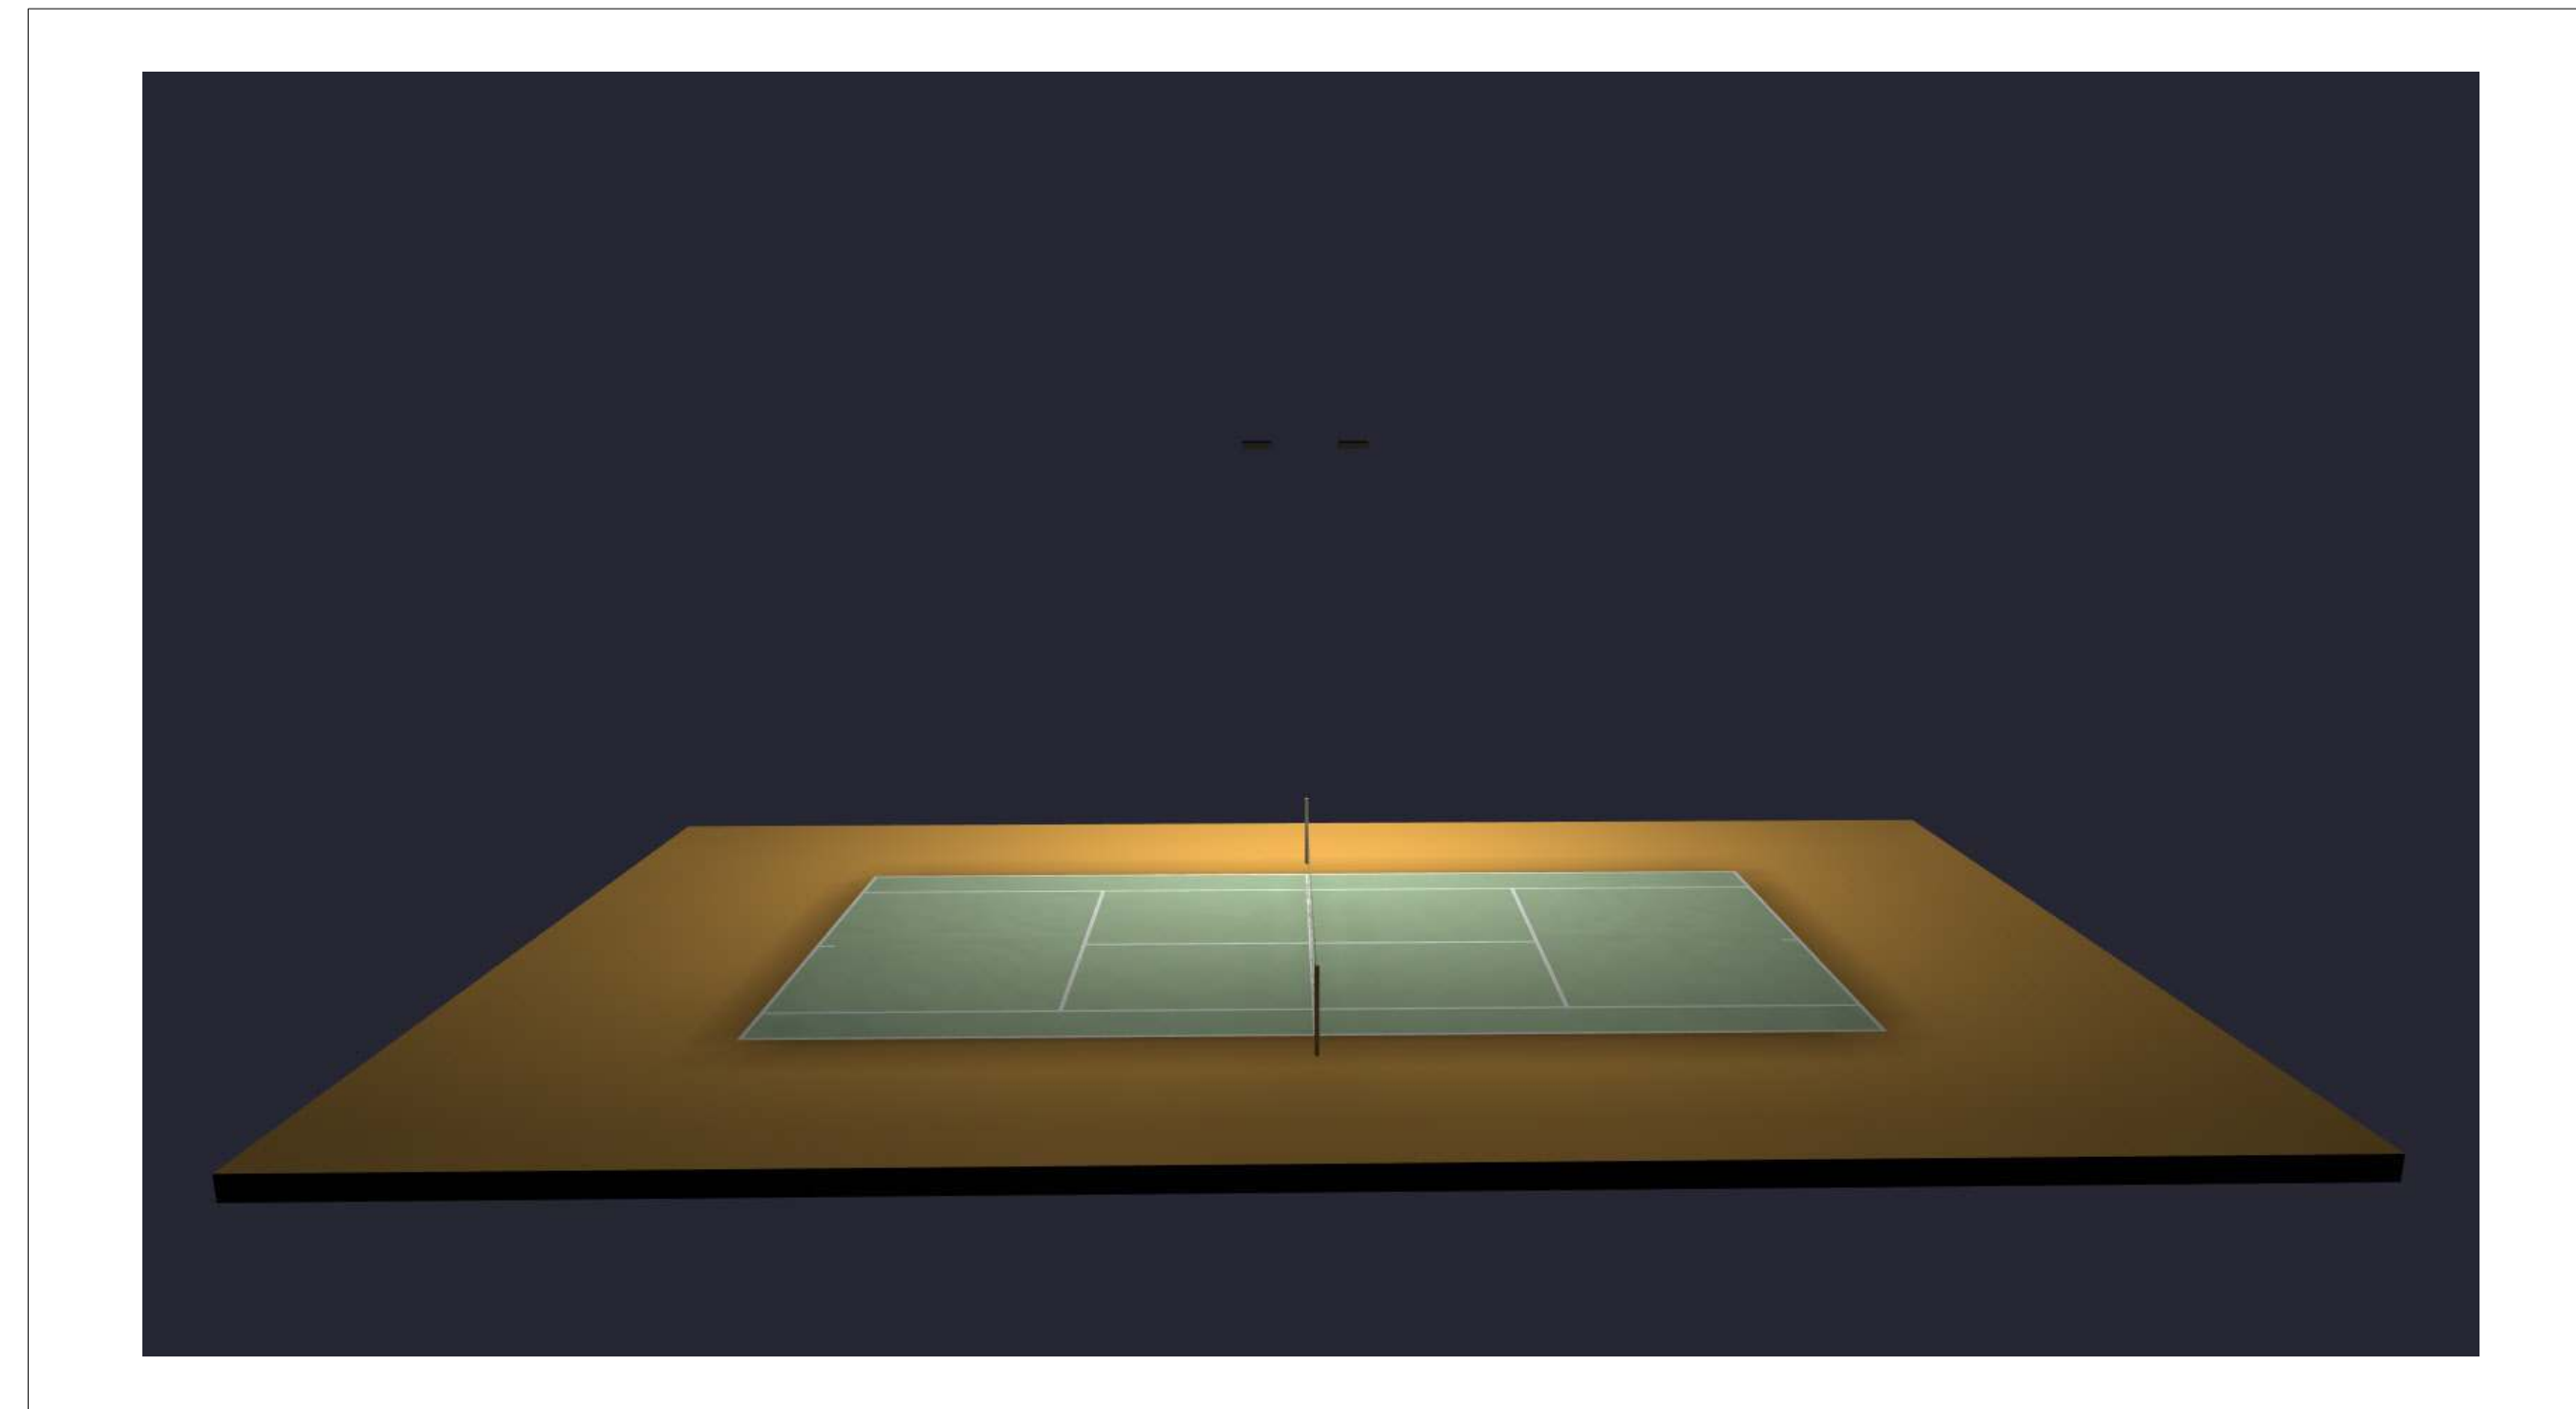


RENDERING

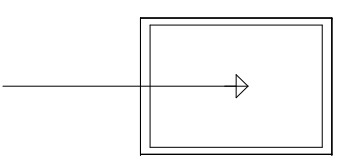Luminaire Schedule							
Symbol	Qty	Label	Arrangement	Description	LLF	Lumens	Watts
	4	F1	Single	500 Watt NextGen III	1.000	62734	496.25


Calculation Summary							
Label	CalcType	Units	Avg	Max	Min	Avg/Min	Max/Min
PAD_Top_1	Illuminance	Fc	25.32	38.5	15.0	1.69	2.57
Tennis Court_1_Surface_1	Illuminance	Fc	32.85	38.0	28.0	1.17	1.36
Tennis Court_Surface_1	Illuminance	Fc	32.85	38.0	28.0	1.17	1.36

Expanded Luminaire Location Summary									
LumNo	Label	Insertion Point			Luminaire Coordinates			Orient	Tilt
		X	Y	Z	X	Y	Z		
1	F1	21	62	25.5	21	60	25.5	270	0
2	F1	22	2	25.5	22	4	25.5	90	0
3	F1	46	62	25.5	46	60	25.5	270	0
4	F1	47	2	25.5	47	4	25.5	90	0

Object Summary		
Label	Type	Description
PAD	Rect-Flat	64' X 68' RED CLAY PAD
Tennis Court	Group	RESIZED TO 44'; X 20' PICKLBALL
Tennis Court1	Group	RESIZED TO 44'; X 20' PICKLBALL

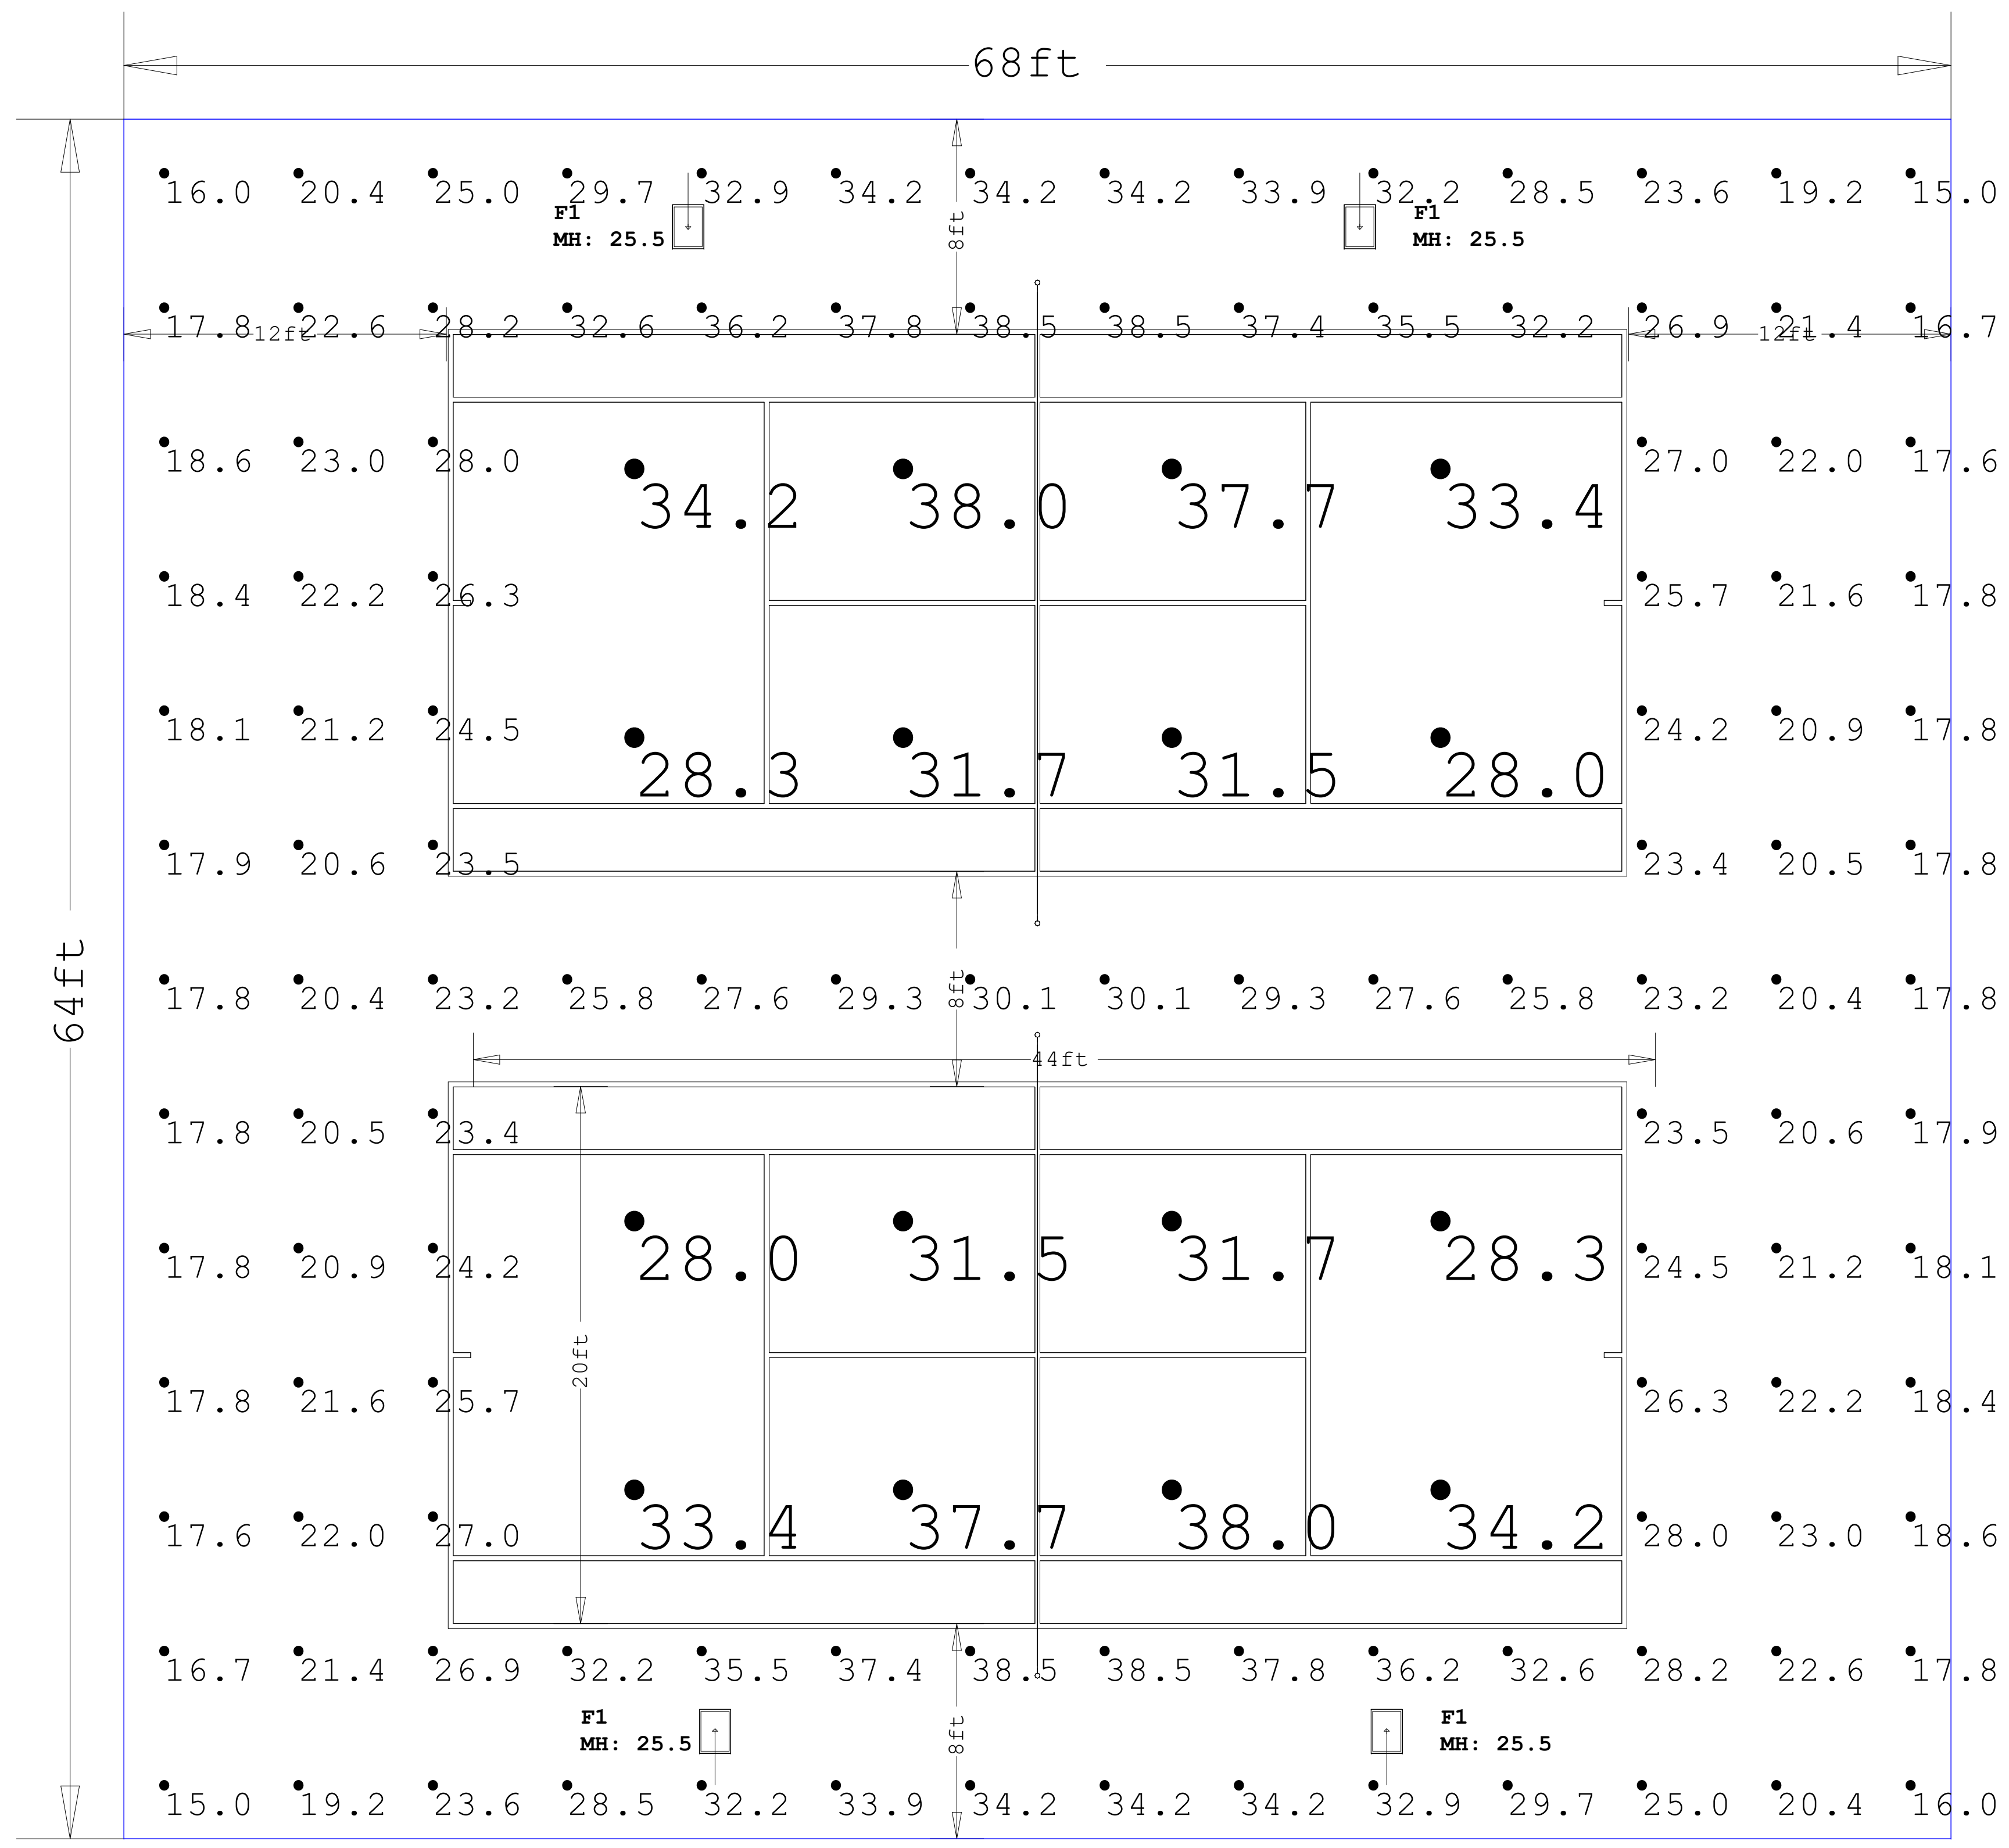

70 x 40 Pickleball Template

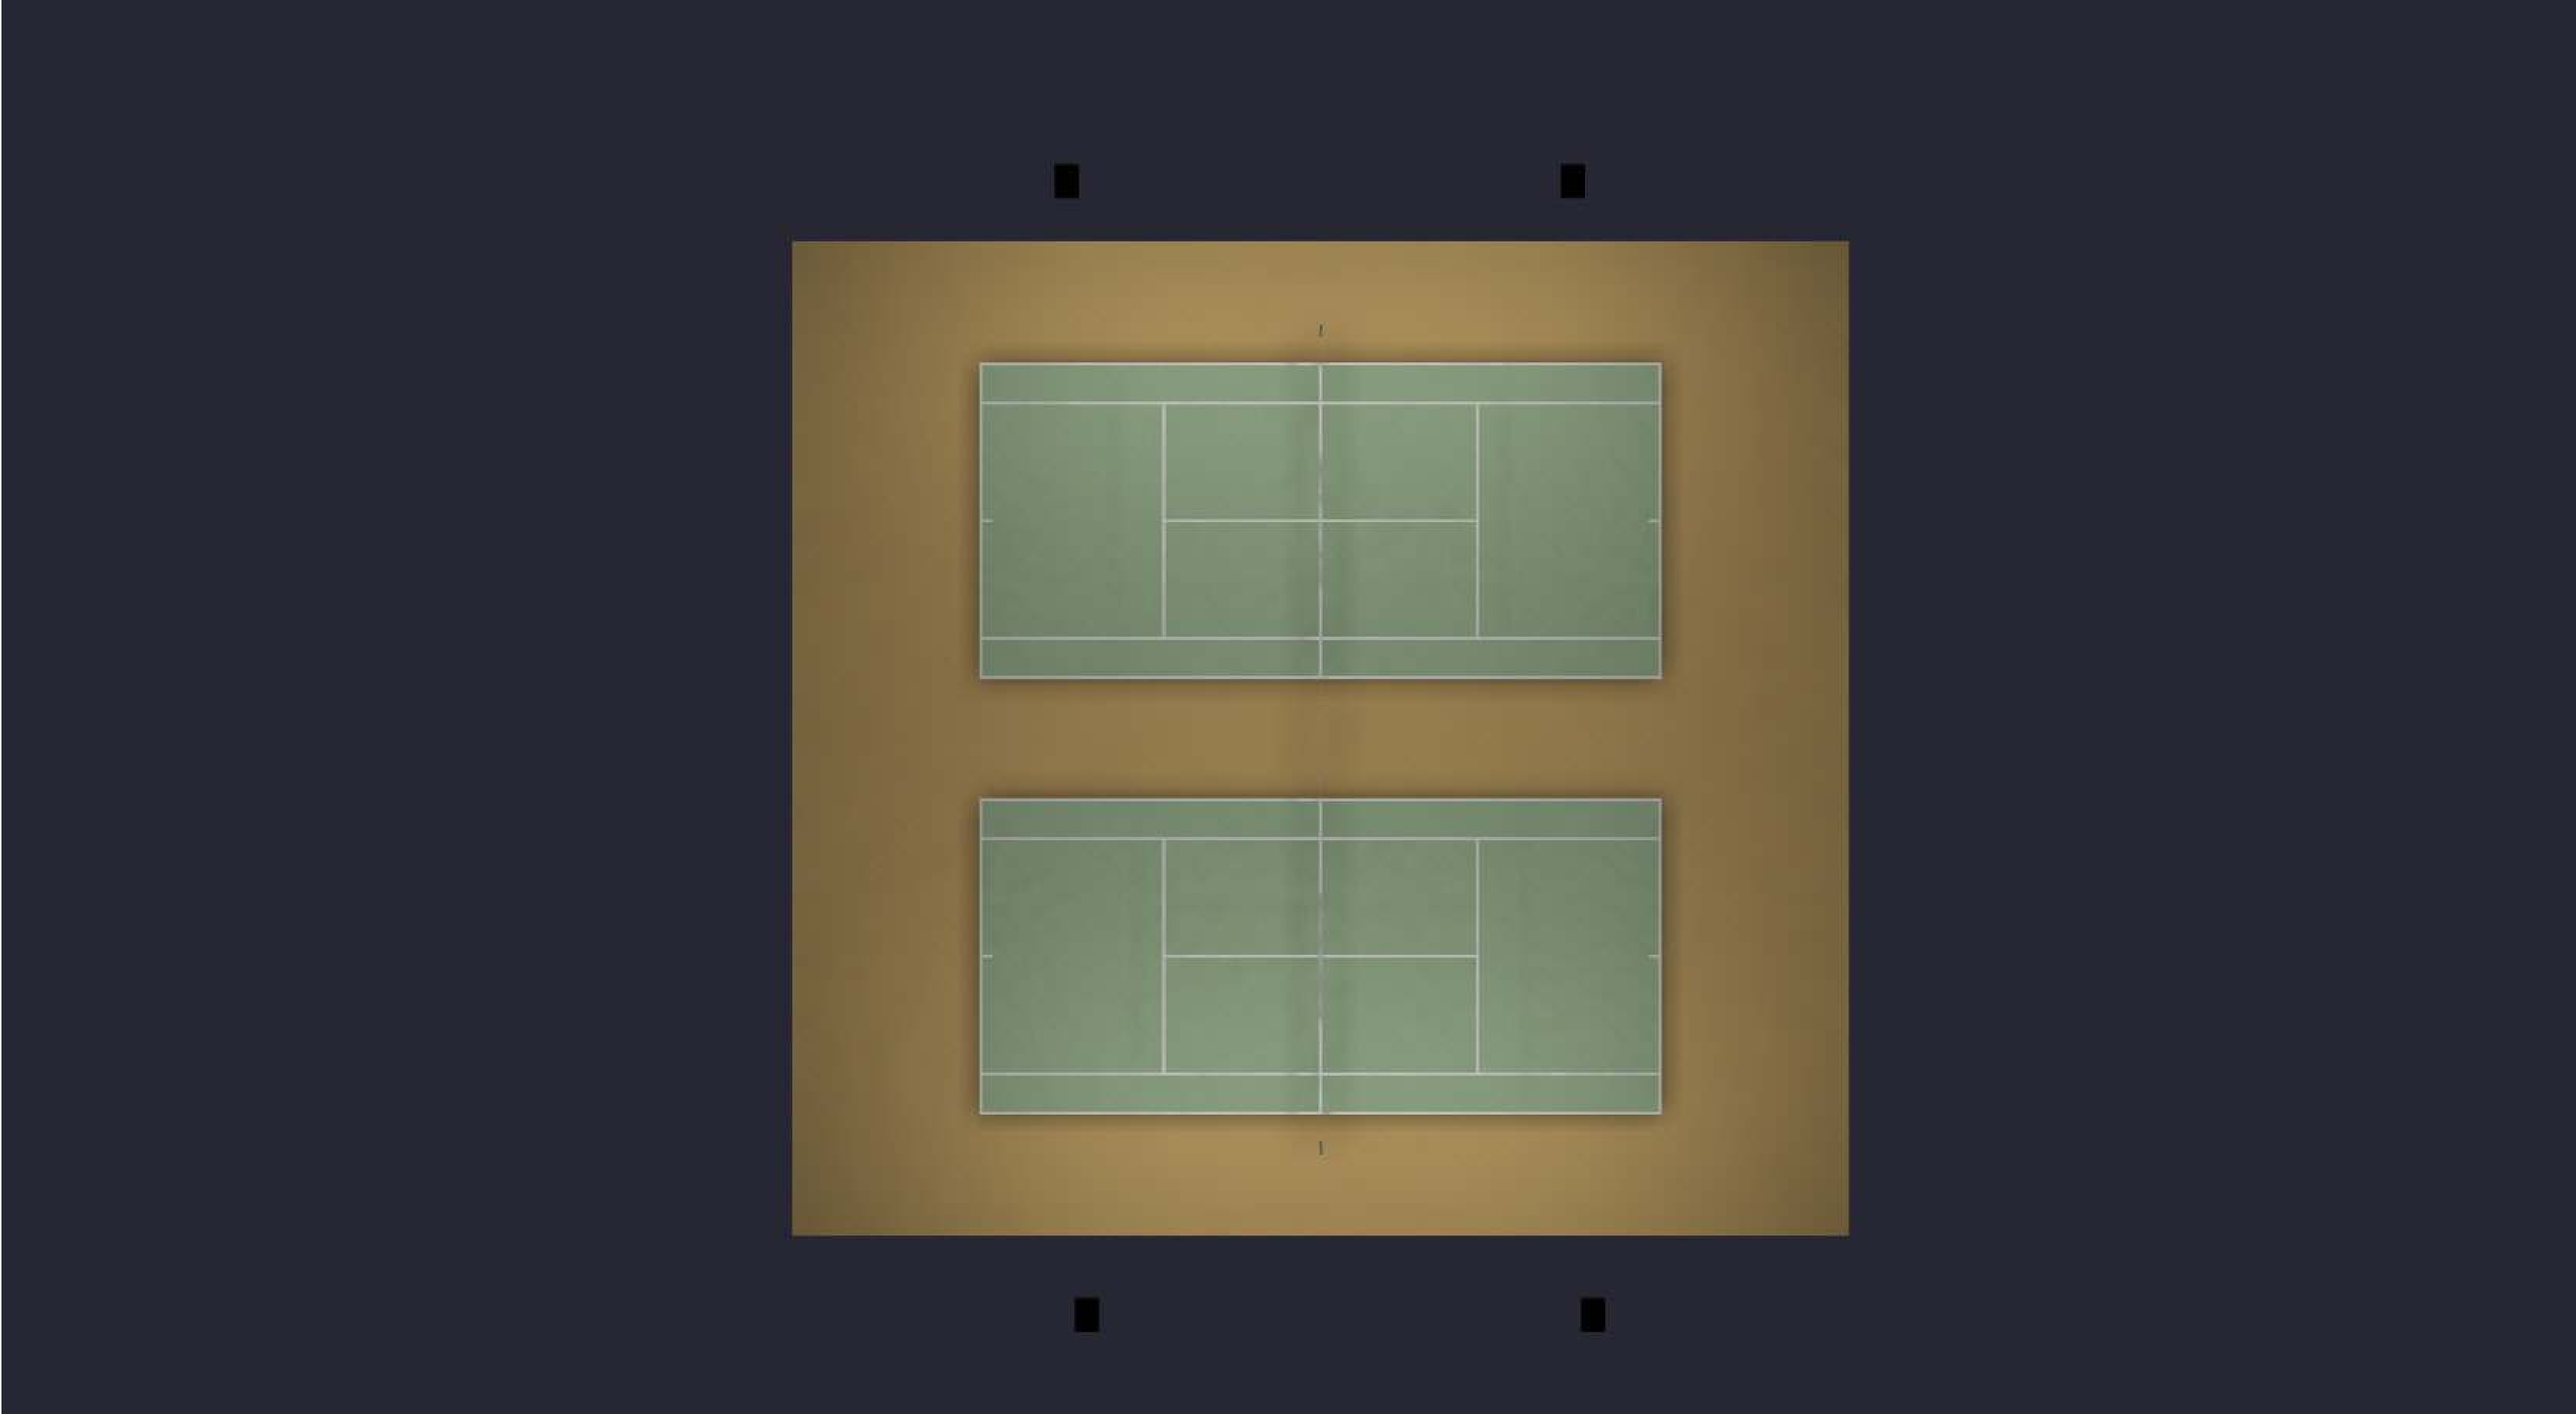


Date:8/25/2025

Drawn By: MS

Revision #:

70 x 40 Pickleball Template

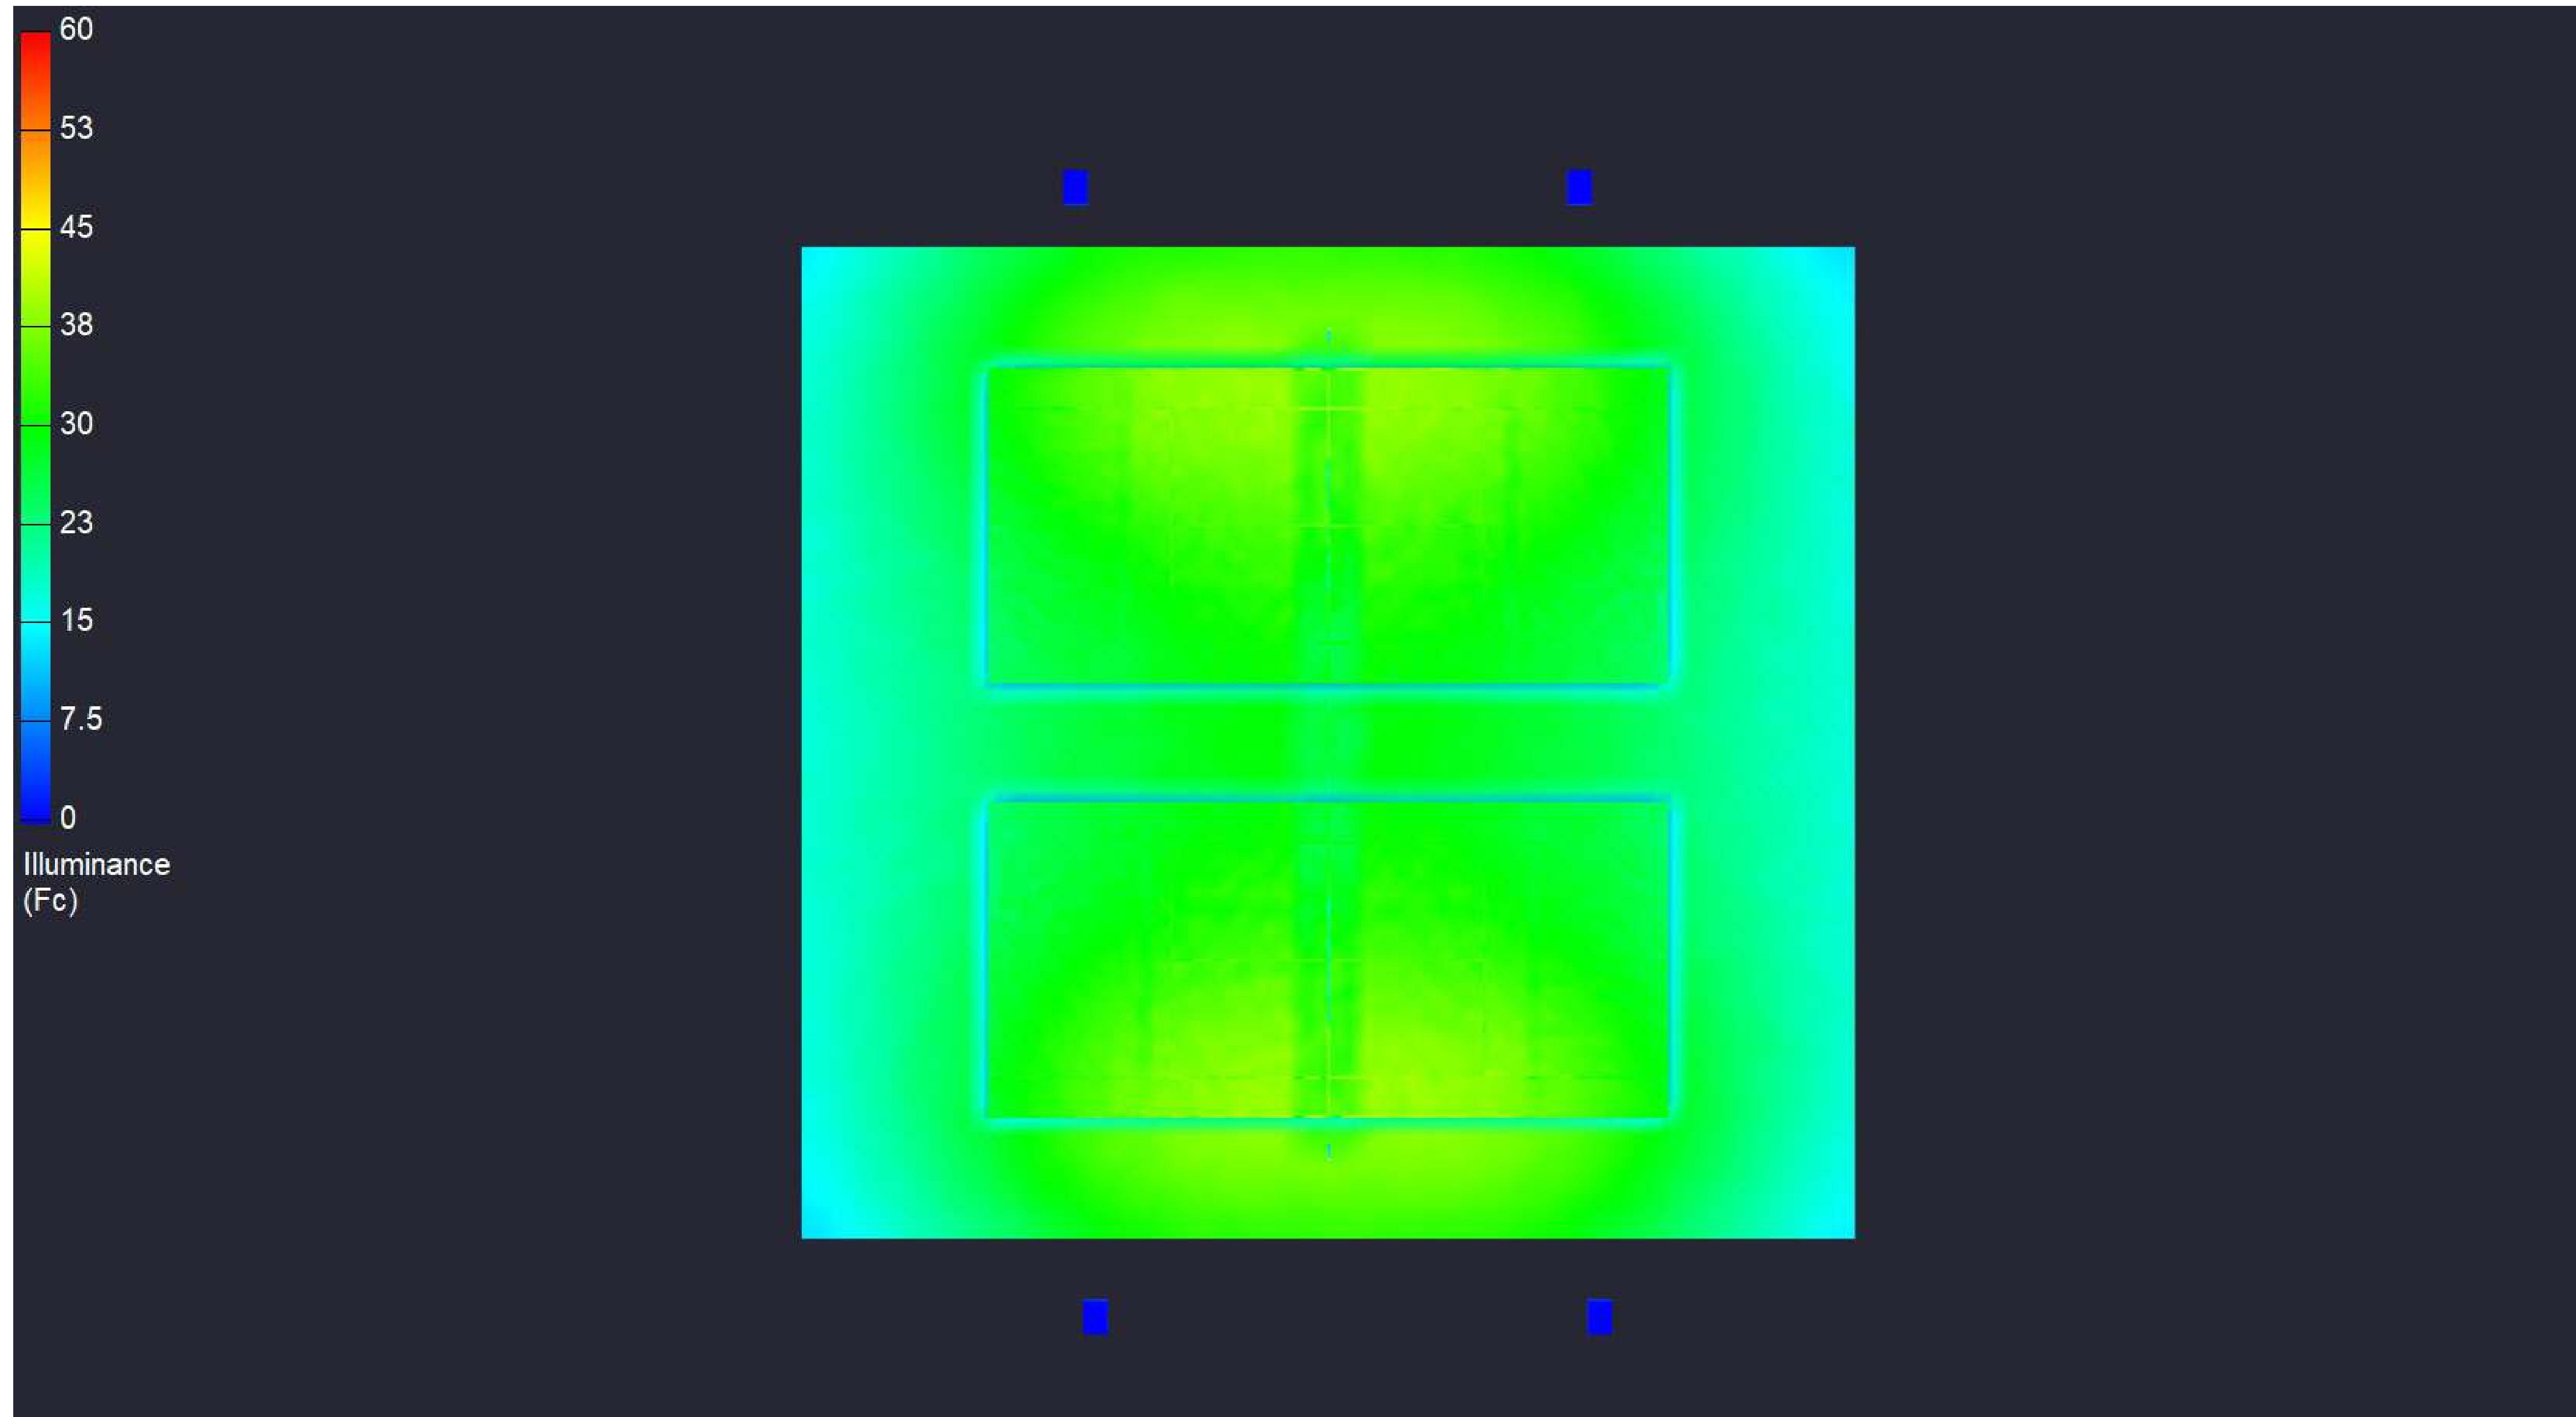

70 x 40 Pickleball Template

Date: 8/25/2025

Drawn By: MS

Revision #: