

PRODUCT DESCRIPTION

THE NEW SOLAR SERIES IS A NEW PRIVATE DESIGN LED SOLAR STREET LIGHT, WITH A SLIM DESIGN AND A HIGHER CONVERSION EFFICIENCY. MONO-CRYSTALLINE PHOTOVOLTAIC SOLAR PANEL WITH A 3.7V INPUT.







Part #: RG-7W-SOLAR-BL

PRODUCT FEATURES & COMMON USE APPLICATIONS

- ✓ Nice design with lighter weight, easier installation
- ✓ Battery life is longer with an 10 hour charge
- ✓ Easy to install and operate
- ✓ Energy saving, long lifespan
- ✓ Instant start, NO flickering, NO humming
- ✓ Green and eco-friendly without mercury
- ✓ Street Lighting
- ✓ Outdoor landscaping light
- ✓ Building, The Hotel.
- ✓ Parking Lot

PRODUCT DIMENSIONS

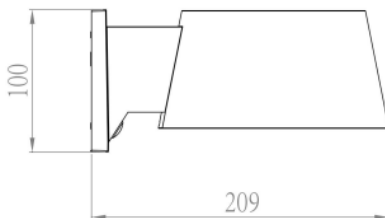

Rugged Grade Lighting
Industrial Grade Solutions



LEGENDARY USA SUPPORT



US based
phone and online
customer support

DIC
CERTIFIED

5 YEARS
WARRANTY

UL
LISTED



888-953-2476
sales@ruggedgrade.com


PRODUCT TECHNICAL SPECIFICATIONS

OPTICAL	Input Power (Tolerance: ±10%)	7W
	Color Temperature	4000K
	Lumen (Tolerance: -10%)	2000LM
	Input Voltage	3.7 V
	Battery	3.7V/7.4WH(Charging indicator: The red indicator light flashing)
	Solar Panel	Monocrystalline silicon, 4.86V/ 1W
	CRI	>80
	Efficiency	285 LM/W
	Installation Height	3 Meters
	Control Mode	Button Switch, ON/OFF Long Press 1.5s
ELECTRICAL	Lighting Mode	M1: 25% till dawn M2: 10% + PIR (30S) till dawn M3: 0% + PIR (30S) till dawn M4: 100% till dawn
	Mode Indication	M1: Flash for one time, M2: Flash for two times, M3: Flash for three times, M4: Flash for four times Working indicator: The red indicator light is always on when turn on the light and discharging
	PIR	120°, 5m.Max
MATERIALS	Core technology	ALS 2.3 / TCS 1.0
	Switch	1. on and off: long press for 1.5S 2. Short press to switch the lighting mode
	IP	IP44
	LED Brand	OSRAM 2835
	LED QTY	21
	Housing	ABS + Panlite PC
	Housing Color	Black
	Waterproof Rating	(IP44)
OTHERS	Operating Temperature	-25°C TO 50°C
	Storage Temperature	-20°C TO 45°C
	Operating Humidity	20% - 90% RH
	Storage Humidity	10% - 95% RH
	Warranty	1 year warranty
	Charge Time	10hours(with enough strong shine)

PRODUCT ACCESORIES



PRODUCT IMAGES & FEATURES

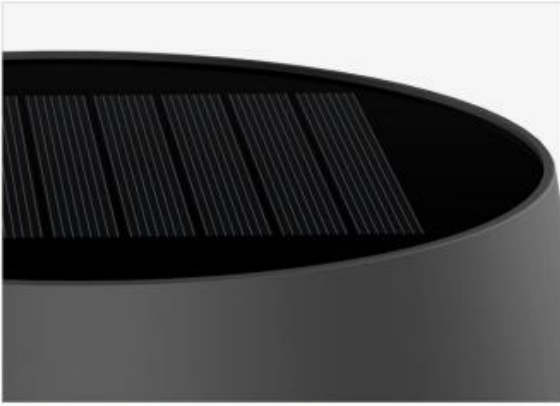

Monocrystalline silicon solar panel



High lumen LEDs 160lm/W



PIR: 120°, 5m.Max





Silicone button

Four lighting mode selections, smooth transition of light without a steep drop



INSTALLATION INSTRUCTIONS

Punch holes in the wall and install plastic columns
Fix the lamp with screws

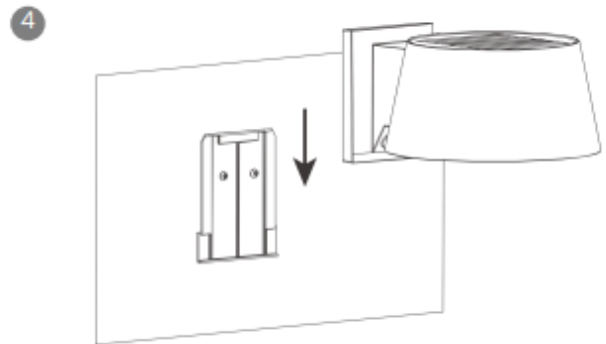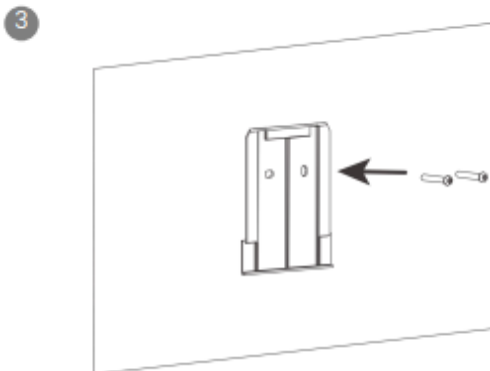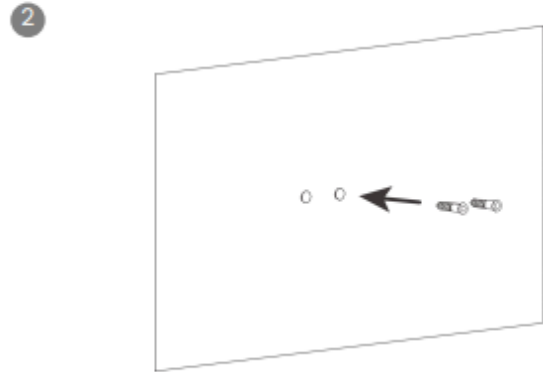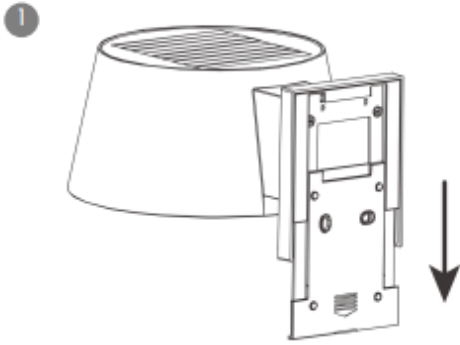

PRODUCT IMAGES & FEATURES



LEGENDARY USA SUPPORT



PACKAGING

LAMP: 1 PC
INSTRUCTIONS: 1 PC
SCREW: 1 SET



1 PC / 1 BOX



24 PCS / CARTON



CARTON

COLOR BOX

PRODUCT LIST

STEP 1

STEP 2

STEP 3

PACKING METHOD	PCS/CTN	QTY(PCS)	CTN QTY	CARTON SIZE(MM)	N.W.(KG)	G.W.(KG)
INNER BOX	1	1	1	214*166*110	0.42	0.58
CARTON	24	24	1	518*448*460	10	15

Net weight and gross weight are for reference only



PRODUCT WARNINGS

- ⚡ Please turn off power before install or change assembly parts.
- ⚡ The input voltage and lamps should be matched, after connecting the power line.
- ⚡ Please make sure the wiring section is insulated.
- ⚡ Professionals must install and disassemble the lamps.
- ⚡ Surge is the number 1 cause of LED light failure. Outdoor lights must have surge at fixture, pole, and breaker.
- ⚡ Surge is the number 1 cause of LED light failure. Indoor lights must have surge at fixture and breaker.

PRODUCT TROUBLESHOOTING

Issue	Check points
Light Flickers	Check all wiring for disconnections, shorts and burnt wiring and connections. Confirm steady input voltage to the light fixture, fluctuating input voltage will harm the LED driver and can lead to premature failure. Lights with photocells can have photocell tag from ambient light or light reflecting at the sensor. Simply cover the photocell completely and see if flickering continues while the photocell is covered. Call Tech Support for help if none of the above solves the issue.
Light does not work at all.	Check all wiring for disconnections, shorts and burnt wiring and connections. Confirm steady input voltage to the light fixture, fluctuating input voltage will harm the LED driver and can lead to premature failure. If input voltage is not in the voltage range of the fixture, you will need to find the source of your input voltage issue. Call Tech Support for help if none of the above solves the issue.

For more technical information, install questions, troubleshooting help or warranty claims, we have a dedicated US Tech and Customer Support Team to help solve any issues you have and can be reached by email or phone. If you need help with any of our products, we are here for you so that you are never in the dark!

BETTER LIGHTS. BETTER SUPPORT.





CERTIFIED



LISTED





US based
phone and online
customer support



**5 YEARS
WARRANTY**