

## PRODUCT DESCRIPTION

Ultimate Versatility in Lighting! The new Kivo II CS is now packed with Tunable Technology from RuggedGrade giving you control to choose Kelvin Color & Wattage on fixture! With a High Efficiency of up to 145 Lumen to Watt, this version now gives you Dusk to Dawn lighting capability and comes with a port for an optional motion sensor, so you decide your best lighting options!




**DLC #: RGL-KIVO2-30WBH8DA1**

## PRODUCT FEATURES & COMMON USE APPLICATIONS

- UL cUL DLC 5.1 Premium certificate.
- Bridgelux Chip, high CRI
- IP65 driver, input voltage 120-277VAC.
- Color Adjustable.
- No UV or IR in the beam.
- Easy to install and operate.
- Energy saving, long lifespan.
- Light is soft and uniform, safe to eyes.
- Instant start, NO flickering, NO humming.
- Green and eco-friendly without mercury.
- Outdoor basketball court, tennis court.
- Badminton court, the football field.
- The school playground, stadium.
- Community leisure entertainment plaza,
- Warehouse, factory and workshops ;
- Highway toll station ;
- Meeting room, exhibition hall ;
- Gymnasium and supermarkets, etc.

## PRODUCT DIMENSIONS

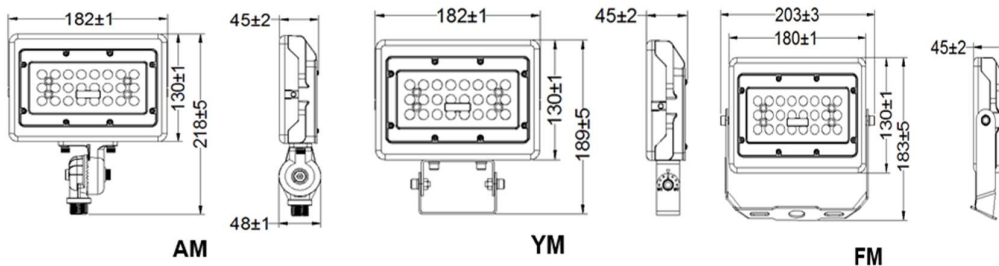

### LEGENDARY USA SUPPORT



## PRODUCT TECHNICAL SPECIFICATIONS

<b>OPTICAL</b>	Input Power (Tolerance : ±10%)	30W		
	Color Temperature (Color Tunable)	3000K	4000K	5000K
	Lumen(Tolerance: ±10%)	3870LM	4350LM	4110LM
	Efficacy(Tolerance : ±3%)	129LM/W	145LM/W	132LM/W
	CRI	>80		
	Color Consistency	<7 Steps (or <7 SDCM)		
	Distribution Pattern	7H7V		
	Field Angle (10%) (Tolerance : ±15%)	150 Degree		
<b>ELECTRICAL</b>	Input Voltage and Frequency	120-277VAC, 50/60Hz		
	PF (Tolerance : -3%)	≥0.9		
	THD (Tolerance : +5%)	≤20%		
	Flicker Percent	< 30%		
	Driver Brand	HBE		
	Driver Model	HB-FL19F035		
	Driver Surge protection	L/N-PE: 2.5kV, L-N: 2.5kV		
	Dimming	0-10V dimming standard		
	Sensor Type	No Sensor		
	Optional Accessory	Surge-protective Device		
	<b>MATERIALS</b>	LED Brand	Lumileds	
LED Type		SMD2835		
LED QTY		48 PCS*2		
Housing		Die-cast aluminum		
Housing Color		Brown, Black, or Customized		
EPA		0.42 ft <sup>2</sup>		
Waterproof Rating		WET (IP65)		
<b>OTHERS</b>	Operating Temperature	-30°C TO 45°C;		
	Storage Temperature	-40°C TO 80°C		
	Operating Humidity	20% - 90% RH		
	Storage Humidity	20% - 95% RH		
	Warranty	5 years		

## PRODUCT MOUNTS & ACCESSORIES

**AM**



**YM**



**FM**







## PHOTOMETRICS & DLC PRODUCT SPEC

### STREETLIGHT PHOTOMETRIC TEST REPORT

Test:U:121.13V I:0.2433A P:29.108W PF:0.9878 Freq:60.00Hz Lamp Flux:4005.89x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 137.62 lm/W
MODEL		I <sub>max</sub> (cd)	1195	η street_up (%)	0.0	
NOMINAL POWER (W)	30	LOR (%)	100.0	η street_down (%)	49.7	
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	4006	η house_up (%)	0.0	
NOMINAL FLUX (lm)	4005.89	MAXIMUM @ (C, γ )	180,30.0	η house_down (%)	50.3	
LAMPS INSIDE	1	η up (%)	0.0	76 FLASHAREA (m2)	0.05000	
TEST VOLTAGE (V)	120	η down (%)	100.0	SLI	19.828	

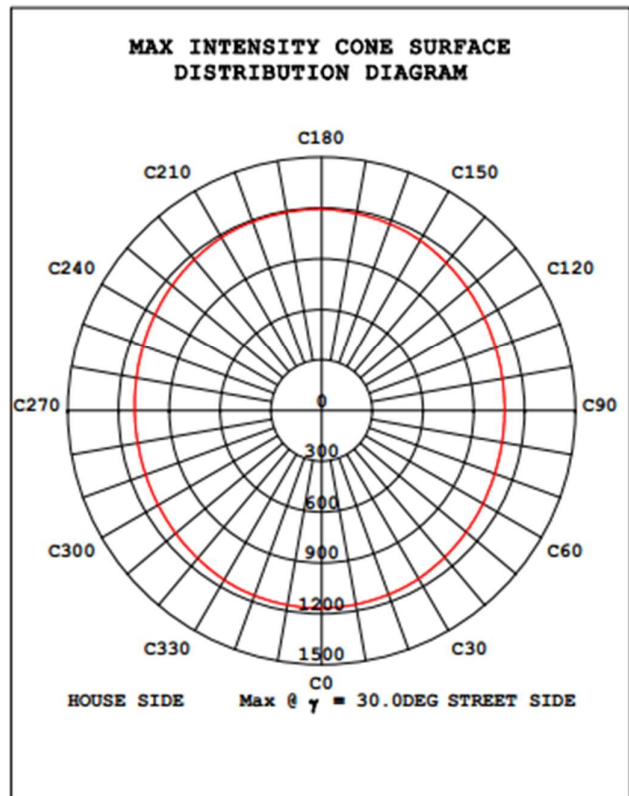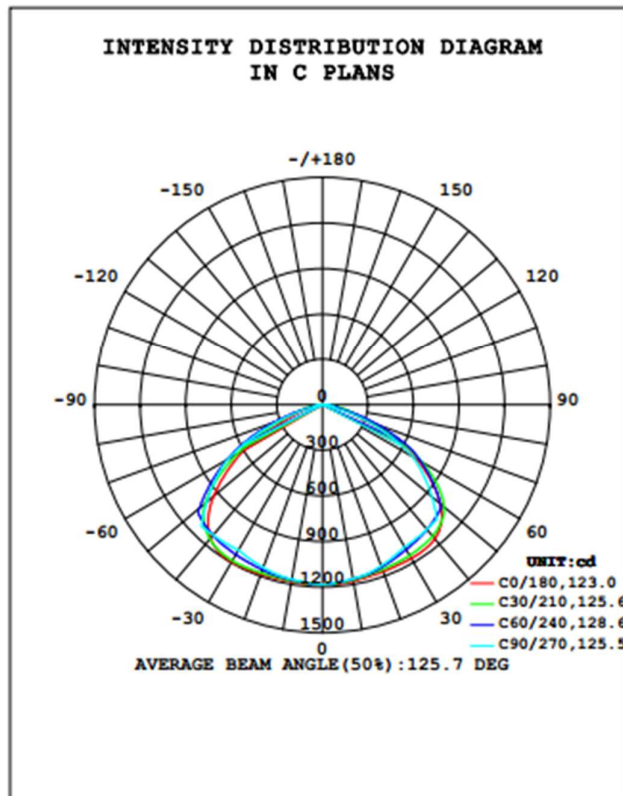

Product ID: S-QF7TM4

×



## RGL-KIVO2-30WBH8DA1-abcde

**Manufacturer:** RuggedGrade  
**Brand:** RuggedGrade

### PRODUCT OVERVIEW

<b>Classification</b>	Premium
<b>Primary Use</b>	Outdoor Pole/Arm-Mounted Area and Roadway Luminaires
<b>Reported Input Wattage</b>	29.1 W
<b>Reported Light Output</b>	3782 lm
<b>Reported CCT</b>	3000 K
<b>Reported CRI (Ra)</b>	82
<b>Product ID</b>	S-QF7TM4
<b>DLC Family Code</b>	<a href="#">SLFAKD</a>
<b>Listing Status</b>	Listed
<b>Date Qualified</b>	2023-03-21

### PRODUCT INFORMATION

<b>Qualified Product List</b>	Solid State Lighting
<b>Technical Requirements Version</b>	5.1
<b>Product ID</b>	S-QF7TM4
<b>Manufacturer</b>	RuggedGrade
<b>Brand</b>	RuggedGrade
<b>Model Number</b>	RGL-KIVO2-30WBH8DA1-abcde
<b>Parent</b>	Yes
<b>Classification</b>	Premium

### PRODUCT CATEGORIZATION

[VIEW DETAILS](#)

### PRODUCT CAPABILITIES

[VIEW DETAILS](#)

### REPORTED PHOTOMETRIC PERFORMANCE

<b>Reported Light Output</b>	3782 lm
<b>Reported Efficacy (AC)</b>	129.97 lm/W
<b>Reported CCT</b>	3000 K
<b>Reported CRI (Ra)</b>	82
<b>Reported R9</b>	5
<b>Reported IES Rf</b>	84
<b>Reported IES Rg</b>	97
<b>Reported IES Rcs,h1</b>	-11

### REPORTED ELECTRICAL PERFORMANCE


<b>Reported Input Wattage</b>	29.1 W
<b>Reported Total Harmonic Distortion</b>	15 %
<b>Reported Power Factor</b>	0.9
<b>Reported Maximum Input Wattage</b>	29.1
<b>Reported Default Input Wattage</b>	29.1 W
<b>Voltage Range</b>	120-277 V



## PRODUCT PACKAGING

Bracket Type	Carton Size	Qty / Carton	Net Weight / Carton	Gross Weight / Carton
AM, YM, FM	Outer box:487*300*310mm	8 PCS	8.8Kg	11.3Kg
	Inner box:235*70*290mm	1 PC	1.1Kg	1.3Kg

\*Tolerance of Carton Size: ±15 MM, Tolerance of Weight: ±10%.

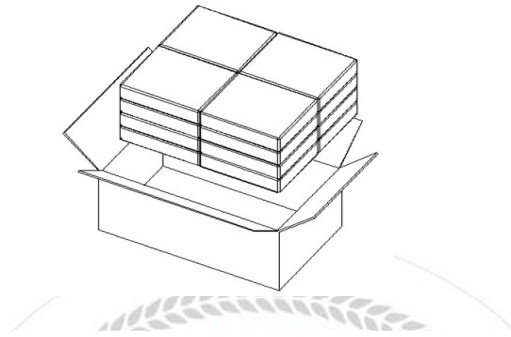

## PRODUCT WARNINGS

- ⚡ Please turn off power before install or change assembly parts.
- ⚡ The input voltage and lamps should be matched, after connecting the power line.
- ⚡ Please make sure the wiring section is insulated.
- ⚡ Professionals must install and disassemble the lamps.
- ⚡ Surge is the number 1 cause of LED light failure. Outdoor lights must have surge at fixture, pole, and breaker.
- ⚡ Surge is the number 1 cause of LED light failure. Indoor lights must have surge at fixture and breaker.

## PRODUCT TROUBLESHOOTING

Issue	Check points
Light Flickers	Check all wiring for disconnections, shorts and burnt wiring and connections. Confirm steady input voltage to the light fixture, fluctuating input voltage will harm the LED driver and can lead to premature failure. Lights with photocells can have photocell tag from ambient light or light reflecting at the sensor. Simply cover the photocell completely and see if flickering continues while the photocell is covered. Call Tech Support for help if none of the above solves the issue.
Light does not work at all.	Check all wiring for disconnections, shorts and burnt wiring and connections. Confirm steady input voltage to the light fixture, fluctuating input voltage will harm the LED driver and can lead to premature failure. If input voltage is not in the voltage range of the fixture, you will need to find the source of your input voltage issue. Call Tech Support for help if none of the above solves the issue.

For more technical information, install questions, troubleshooting help or warranty claims, we have a dedicated US Tech and Customer Support Team to help solve any issues you have and can be reached by email or phone. If you need help with any of our products, we are here for you so that you are never in the dark!

# BETTER LIGHTS. BETTER SUPPORT.

