

## PRODUCT DESCRIPTION

THE BEST IN SPORT AND AREA LIGHTING GETS BETTER. ICON PRO III HAS A DUAL SLIP-FIT AND FLOOD BRACKET MOUNT, INDIVIDUALLY ROTATING PANELS FOR PRECISE LIGHT PLACEMENT, EASILY CHANGED LENSES FOR PERFECT ANGLES, COMBINED WITH 140+ LUMENS TO WATT AND DLC 5.1 CERTIFICATION


DLC #: RGL-ICONPRO3-1000WCS4H1



## PRODUCT FEATURES & COMMON USE APPLICATIONS

- UL cUL certificate
- Input voltage 277-480VAC
- No UV or IR in the beam
- Easy to install and operate
- Energy saving, long lifespan
- Instant start, NO flickering, NO humming
- Green and eco-friendly without mercury
- Output constant current lever can be adjusted through output cable with 1-10V.
- Sport Stadiums
- Sport Courts
- Arenas
- Gymnasium
- Square plaza
- Shipyard
- Airport
- Wharf
- High mast and Contour lighting, etc.


## PRODUCT DIMENSIONS

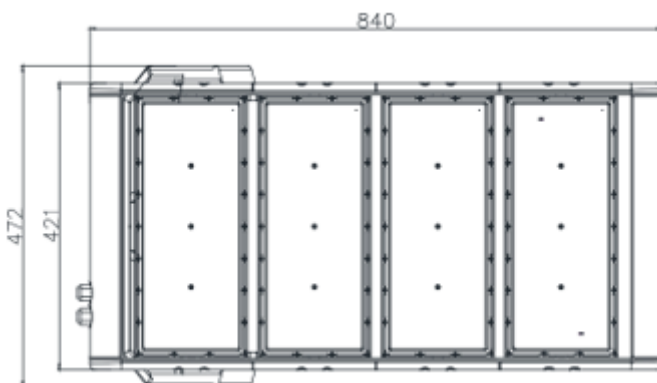

### LEGENDARY USA SUPPORT



US based phone and online customer support





## PRODUCT TECHNICAL SPECIFICATIONS

<b>OPTICAL</b>	Input Power (Tolerance: $\pm 10\%$ )	1000W
	Color Temperature	5000K
	Lumen (Tolerance: -10%)	140000-150000LM
	Efficacy (Tolerance: -3%)	140-150LM/W
	CRI	>70
	Color Consistency	<6 Steps (or <6 SDCM)
	BUG	B5-U0-G3
	Distribution Pattern	V
Beam Angle (50%) (Tolerance: $\pm 15\%$ )	90°Lens Installed, 40°Lens Included in Box. 60°Available, Call for Order	
<b>ELECTRICAL</b>	Input Voltage and Frequency	277-480VAC, 50/60Hz
	PF (Tolerance : -3%)	$\geq 0.9$
	THD (Tolerance : +5%)	$\leq 20\%$
	Flicker Percent	<5%
	Driver Brand	SOSEN
	Driver Model	SS-240M -56BH*3
	Driver Surge protection	L/N-PE: 10kV, L-N: 6kV
	Dimming	1-10V dimming standard
	Optional Accessory	Surge-protective Device
<b>MATERIALS</b>	LED Brand	Seoul
	LED Type	SMD3030
	LED QTY	1152 PCS
	Housing	Aluminum
	Housing Color	Black
	EPA	2.98 ft <sup>2</sup>
	Waterproof Rating	WET (IP65)
<b>OTHERS</b>	Operating Temperature	40 °C TO 50°C
	Storage Temperature	-40°C TO 80°C
	Operating Humidity	20% - 90% RH
	Storage Humidity	10% - 95% RH
	Warranty	5 years warranty with 24/7 operating hours Luminaire lifetime at 25°C

## PRODUCT MOUNTS & ACCESSORIES



AM



DM



ADM



## PRODUCT IMAGES & ACTUAL INSTALLATIONS





PHOTOMETRICS & DLC PRODUCT SPEC

## Luminaire Property

Luminaire Manufacturer:  
 Luminaire Category:  
 Lamp Catalog:  
 Number of Lamps:  
 Luminous Length (mm):  
 Luminous Height (mm):  
 Current: 3.660 A  
 Power Factor: 0.995


Luminaire Description:  
 Lamp Description:  
 Lumens per Lamp:  
 Luminous Width (mm):  
 Voltage: 277.0 V  
 Power: 1008.78 W

## Photometric Results


IES Classification: Type I  
 Total Rated Lamp Lumens: 132050.0 lm  
 Efficiency: 100%  
 Upward Ratio: 0%  
 C0r0 Intensity: 221939.39 cd  
 Pos of Max. Intensity: H90 V1

Longitudinal Classification: Very Short  
 Measurement Flux: 132050 lm  
 Downward Ratio: 100%  
 Luminaire Efficacy Rating (LER): 130.95  
 Max. Intensity: 222374.32 cd

Luminous Intensity Distribution Curve

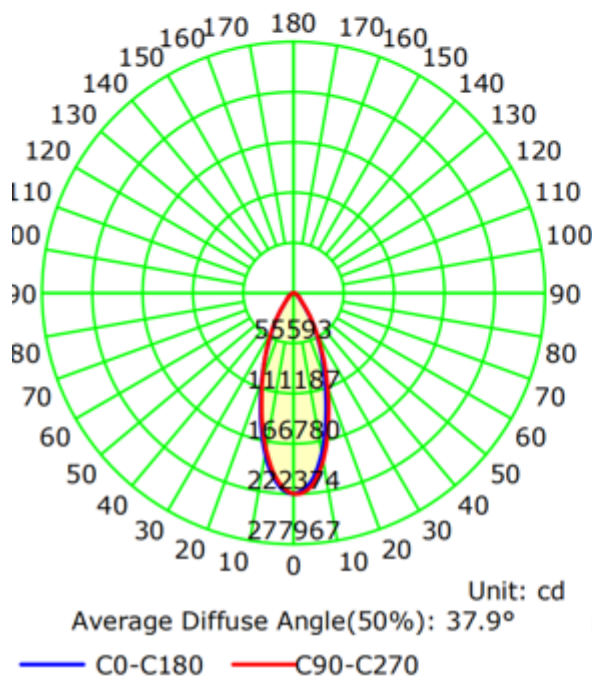

Illuminance at a Distance

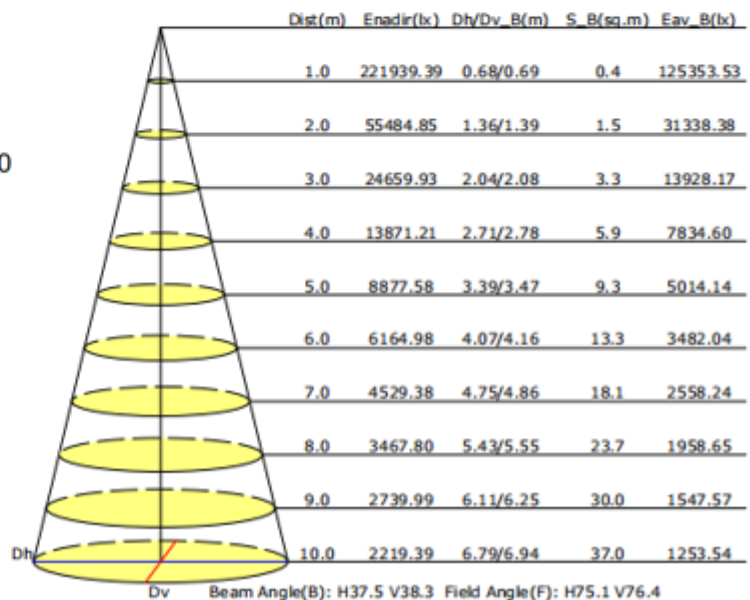

Product ID: PLMUT9G84EGY



## RGL-ICONPRO3-1000WCS4A1-a[AM;DM;A&DM;FM][G;blank] [10SP;20SP;blank]50

Manufacturer: RuggedGrade  
Brand: RuggedGrade

### PRODUCT OVERVIEW

Classification	Premium
Primary Use	Architectural Flood and Spot Luminaires
Reported Input Wattage	1005.76 W
Reported Light Output	139061 lm
Reported CCT	5000 K
Reported CRI (Ra)	70
Product ID	PLMUT9G84EGY
DLC Family Code	<a href="#">EMWABF</a>
Listing Status	Listed
Date Qualified ⓘ	2021-03-12

### PRODUCT INFORMATION

Qualified Product List	Solid State Lighting
Technical Requirements Version ⓘ	5.1
Product ID ⓘ	PLMUT9G84EGY
Manufacturer ⓘ	RuggedGrade
Brand	RuggedGrade
Model Number ⓘ	RGL-ICONPRO3-1000WCS4A1-a[AM;DM;A&DM;FM][G;blank] [10SP;20SP;blank]50
Parent ⓘ	No

### PRODUCT CATEGORIZATION

[VIEW DETAILS](#)

### CONTROL FEATURES

[VIEW DETAILS](#)

### REPORTED PHOTOMETRIC PERFORMANCE

[VIEW DETAILS](#)

### REPORTED ELECTRICAL PERFORMANCE


Reported Input Wattage ⓘ	1005.76 W
Reported Total Harmonic Distortion ⓘ	15 %
Reported Power Factor ⓘ	0.9
Reported Default Input Wattage	1005.76 W
Voltage Range ⓘ	120-277 V



## PRODUCT PACKAGING

Bracket Type	Carton Size	Qty / Carton	Net Weight / Carton	Gross Weight / Carton
AM	1100*542*250MM	1 PC	32 KG	32.5 KG
FM	840*472*131 MM	1 PC	32 KG	32.5 KG

\*Tolerance of Carton Size: ±15 MM, Tolerance of Weight: ±10%.

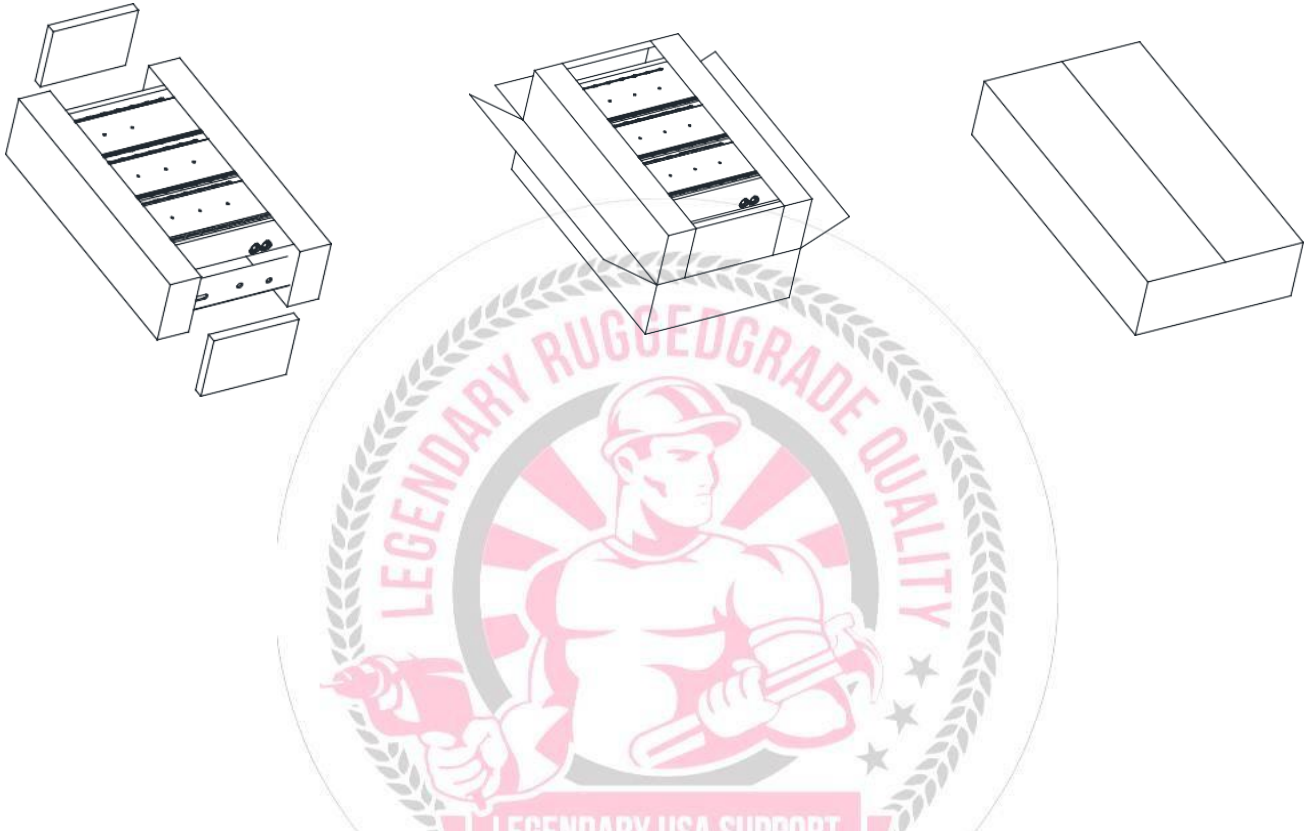

## PRODUCT WARNINGS

- ⚡ Please turn off power before install or change assembly parts.
- ⚡ The input voltage and lamps should be matched, after connecting the power line.
- ⚡ Please make sure the wiring section is insulated.
- ⚡ Professionals must install and disassemble the lamps.
- ⚡ Surge is the number 1 cause of LED light failure. Outdoor lights must have surge at fixture, pole, and breaker.
- ⚡ Surge is the number 1 cause of LED light failure. Indoor lights must have surge at fixture and breaker.

## PRODUCT TROUBLESHOOTING

Issue	Check points
Light Flickers	Check all wiring for disconnections, shorts and burnt wiring and connections. Confirm steady input voltage to the light fixture, fluctuating input voltage will harm the LED driver and can lead to premature failure. Lights with photocells can have photocell tag from ambient light or light reflecting at the sensor. Simply cover the photocell completely and see if flickering continues while the photocell is covered. Call Tech Support for help if none of the above solves the issue.
Light does not work at all.	Check all wiring for disconnections, shorts and burnt wiring and connections. Confirm steady input voltage to the light fixture, fluctuating input voltage will harm the LED driver and can lead to premature failure. If input voltage is not in the voltage range of the fixture, you will need to find the source of your input voltage issue. Call Tech Support for help if none of the above solves the issue.

For more technical information, install questions, troubleshooting help or warranty claims, we have a dedicated US Tech and Customer Support Team to help solve any issues you have and can be reached by email or phone. If you need help with any of our products, we are here for you so that you are never in the dark!

# BETTER LIGHTS. BETTER SUPPORT.

