

# LURI SERIES

150W - FLOOD MOUNT  
Product Spec Sheet



COMMERCIAL-GRADE

LED Flood Light

## Product Overview

Elevate your spaces with Luri Series by Hetria Lighting. These cutting-edge LED lights feature integrated drivers, high lumen efficiency, built-in surge protection, UL listing for safety, and a 3-year warranty.

Experience innovation that's smaller, brighter, and environmentally friendly. Illuminate responsibly with Hetria Lighting!

Built to withstand the test of time, our units boast an impressive IP65 waterproof rating and are capable of enduring any harsh weather condition ensuring optimal outdoor performance. Illuminate your world with confidence and reliability.

## Product Warranty



3-Year  
Limited Warranty



150,000 Hrs

## Applications






Factories, Libraries, Parks, Residentials, Supermarkets, Railway Stations, Advertising lighting, etc

## Main Features

- **Crystal-Clear White Light:** Drawing just 150W of input power, it delivers an impressive 17,250 lumens. Dimming not available.
- **Elegant & Aesthetic Fixture and Housing:** Design to complement the light, crafted from aluminum with rich, enduring black powder coat for timeless beauty.
- **Flood Mount:** Allows for adjustable positioning on surfaces like walls, poles or ceilings, enabling precise lighting direction.
- **Elegance Meets Performance:** Its stylish design is matched by its impressive functionality so you can install with absolute confidence thanks to its reassuring 3-Year limited warranty.
- **UL Listed:** When you choose UL Certified products you are selecting Superior Quality, Enhance Safety & Unmatched Reliability.
- **Integrated Driver (Driver on Board):** Compact, Sleek & Lightweight! The integrated driver reduces the size, streamlines the design, and lightens the fixture making it more space-efficient for installation with a pleasing appearance.
- **Advanced driver is rated for 120-277V exclusively.**
- **Dusk-to-Dawn Lighting:** Photocell built-in, easy disconnect if not needed.
- **Suitable for use in -22°F to 113°F**
- **Eco-friendly:** Printed on recycled material to reduce waste.



## Model Specifications

Features	Description
Input Wattage	 150 Watts. Replace 400W MH HPS or 1500W Incandescent
Kelvin Color	 5000K Bright White Light
LED Chip	 Bridgelux SMD2835
Lumen Performance	 115Lm/Watt. 150W=17,250 Lumens
Surge Protection	 6kV Built-in for Extended Lifespan

## Key Specifications

- Dimming: 0-10V Dimming Standard
- Efficacy: <115lm/W
- Input Voltage & Frequency: 120-277VAC 50/60Hz
- IP: IP65 Waterproof Rating
- Power Factor (PF): > .90
- Total Harmonic Distortion (THD): <20%
- Color Rendering Index (CRI): >80
- Housing & Lens: Die-cast aluminum/ Clear Tempered Glass
- Operating Temperature: -22°F - 113°F

## Certifications



## Model Specifications

Model	WATT(W)	Lumens (lm)	Efficacy (lm/W)	Mount Type	Kelvin Color (K)	Voltage (V)	CRI
Luri Series	30W	3,450lm	115lm/W	KM/YM	5000K	120VAC	>80
	50W	5,750lm	115lm/W	KM/YM			
	80W	9,200lm	115lm/W	KM/YM			
Luri Series w/PC	150W	17,250	115/lm/W	AM/FM		120-277VAC	

# LURI SERIES

## LED FLOOD LIGHT



**5 YEAR  
WARRANTY**



**5000K CCT  
BRIGHT WHITE**



**120°  
BEAM ANGLE**



**BRIDGELUX  
2835 LEDs**



**CRI 80+**




**2KV  
SURGE PROTECTION  
BUILT-IN**



## Mounting Options

### Flood Mount (FM):

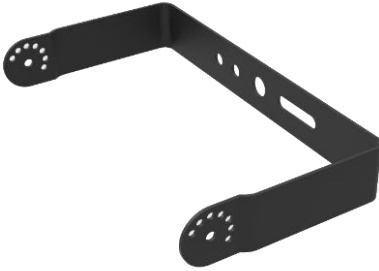

### Slip Fit Mount (AM):



## Photometric Results – 150W Luri Series Led Flood Light

### Luminaire Property

Luminaire Manufacturer:  
Voltage: 121.0 V  
Power: 147.10 W


Current: 1.225 A  
Power Factor: 0.993

### Photometric Results


CIE Class: Direct  
Measurement Flux: 22659.4 lm  
Downward Ratio: 99%  
Horizontal Diffuse Angle(10%,50%): H153.4,H115  
Vertical Diffuse Angle(10%,50%): V151.5,V114.6  
Luminaire Efficacy Rating (LER): 154.09  
Max. Intensity: 7948.07 cd  
S/MH(C0/C180): 1.29

Total Rated Lamp Lumens: 22659.4 lm  
Efficiency: 100%  
Upward Ratio: 1%  
Central Intensity: 7932.35 cd  
Pos of Max. Intensity: H135 V3  
S/MH(C90/C270): 1.29

Luminous Intensity Distribution Curve

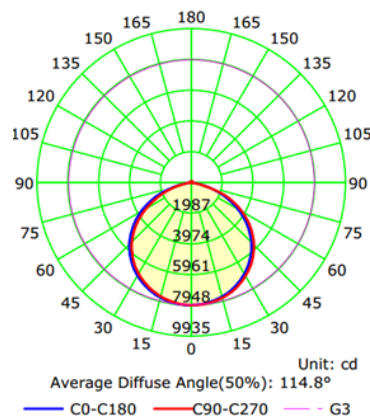

The Average Illuminance Effective Figure

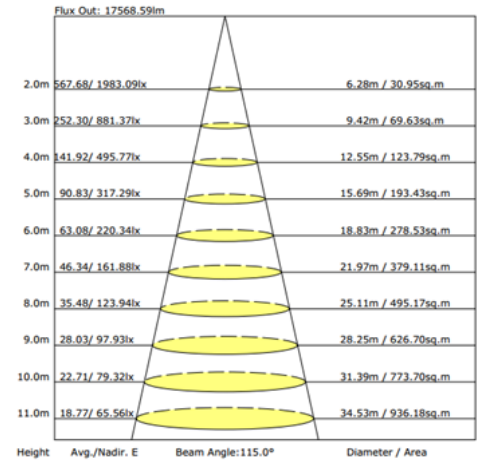

## Sizing & Measurement

Model Series	Height (in)	Length (in)	Width (in)	Net Weight (lbs)	Measurements Diagram
Luri Series 30W KM	7.40	5.98	1.02	1.23	
Luri Series 30W YM	6.25	5.98	1.02	1.23	
Luri Series 50W KM	8.14	7.16	1.18	1.47	
Luri Series 50W YM	7.04	7.16	1.18	1.47	

## Sizing & Measurement

Model Series	Height (in)	Length (in)	Width (in)	Net Weight (lbs)	Measurements Diagram
Luri Series 80W KM	9.17	8.34	1.37	1.91	
Luri Series 80W YM	8.03	8.34	1.37	1.91	
Luri Series 150W AM	15.55	11.81	2.44	6.82	
Luri Series 150W FM	11.77	12.44	2.44	6.09	