


Motion Sensor Install for the NextGen III Parking Lot Light



1. Remove the plug in the sensor port on the light fixture. In the images below, the sensor port is on the right side and the plug needs a Phillips-head screwdriver to unscrew it. Do not tighten, loosen or remove the plug in the center of the housing, this is a pressure port and should be left at the factory setting.
2. Once the plug is removed, you should be able to see what looks like a bullseye inside, this is the contacts for the sensor. Lights without the contacts inside the sensor port are not motion sensor capable.
3. Screw in the motion sensor to the motion sensor port to a nice snug fit. Overtightening can lead to damaging the seal or the sensor.
4. Connect the light to power and test with remote programmer to make sure the sensor is functioning properly.

Step 1

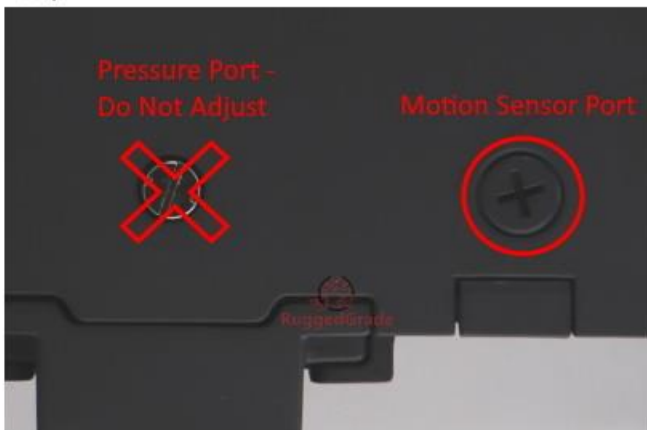

Step 2



Step 3

