

400W Neptune II | LED SPORT LIGHT



PRODUCT DESCRIPTION

THE NEPTUNE SERIES EVOLVES WITH THE SERIES III! 7 YEAR WARRANTY! MORE EFFICIENT WITH HIGHER LUMENS, TOP-TIER SOSEN VP DRIVERS, AND A NEW SIMPLE SLIP-FIT MOUNT OPTION. THE NEPTUNE II IS UL CERTIFIED - THE PINNACLE OF SPORT LIGHTING!




RGL-NEPTUNE-2-400W

PRODUCT FEATURES & COMMON USE APPLICATIONS

- ✓ UL cUL
- ✓ Input voltage 120-277Vac
- ✓ No UV or IR in the beam
- ✓ Easy to install and operate
- ✓ Energy saving, long lifespan
- ✓ Instant start, NO flickering, NO humming
- ✓ Green and eco-friendly without mercury
- ✓ Output constant current lever can be adjusted through output cable with 0-10V.
- ✓ Stadium Fields
- ✓ Gymnasium
- ✓ Square plaza
- ✓ Shipyard, Airport, wharf
- ✓ High mast and Contour lighting, etc.

PRODUCT DIMENSIONS

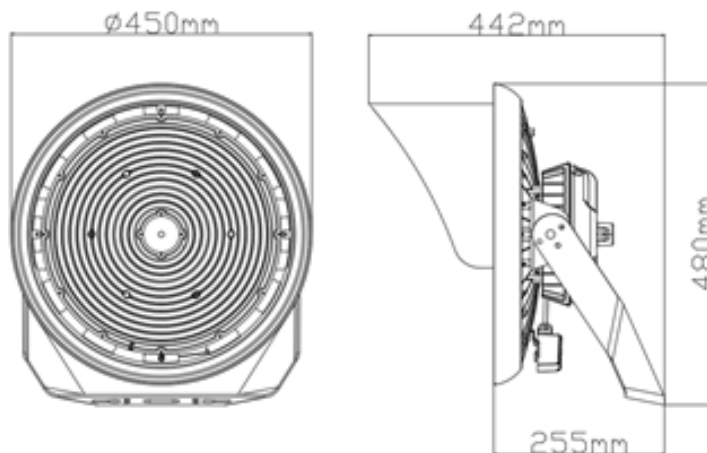

LEGENDARY USA SUPPORT




US based phone and online customer support

DLC CERTIFIED

5 YEARS WARRANTY

UL LISTED



Rugged Grade Lighting
Industrial Grade Solutions



888-953-2476
sales@ruggedgrade.com

PRODUCT TECHNICAL SPECIFICATIONS

OPTICAL	Input Power (Tolerance: $\pm 10\%$)	400W
	Color Temperature	3000K-5700K
	Lumen (Tolerance: -10%)	52000-57200 LM
	Efficacy (Tolerance: -3%)	130-143 LM/W
	CRI	>80
	Color Consistency	< 6 Steps (or < 6 SDCM)
	UGR	<28 (X=4H, Y=8H; S/H=1; Reflectances: 70%/50%/20%)
	Distribution Pattern	NEMA:4
Beam Angle (50%) (Tolerance: $\pm 15\%$)	90°	
ELECTRICAL	Input Voltage and Frequency	120-277VAC, 50/60Hz
	PF (Tolerance: -3%)	≥ 0.9
	THD (Tolerance: +5%)	$\leq 20\%$
	Flicker Percent	<5%
	Driver Brand	Daermay Driver (0-10V dimming)
	Driver Model	SS-200NH-260BH*2
	Driver Surge protection	L/N-PE: 10kV, L-N:10kV
	Dimming	0-10V dimming standard
Optional Accessory	Motion Sensor, Surge-protective Device	
MATERIALS	LED Brand	Lumileds
	LED Type	SMD2835
	LED QTY	1120 PCS
	Housing	Die-cast aluminum
	Housing Color	Black, White, or Customized
	EPA	Call for more info
Waterproof Rating	WET (IP65)	
OTHERS	Operating Temperature	Without Motion Sensor: -40°C TO 50°C/With Motion Sensor: -30°C TO 50°C
	Storage Temperature	-40°C TO 80°C
	Operating Humidity	20% - 90% RH
	Storage Humidity	10% - 95% RH
Warranty	7 years warranty with 24/7 operating hours Luminaire lifetime at 25°C.	

PRODUCT ACCESORIES



PRODUCT IMAGES & ACTUAL INSTALLATIONS





Actual Install - ECMX Motorsports Park MT



PHOTOMETRICS & DLC PRODUCT SPEC

LIGHT DISTRIBUTION TESTING PARAMETERS

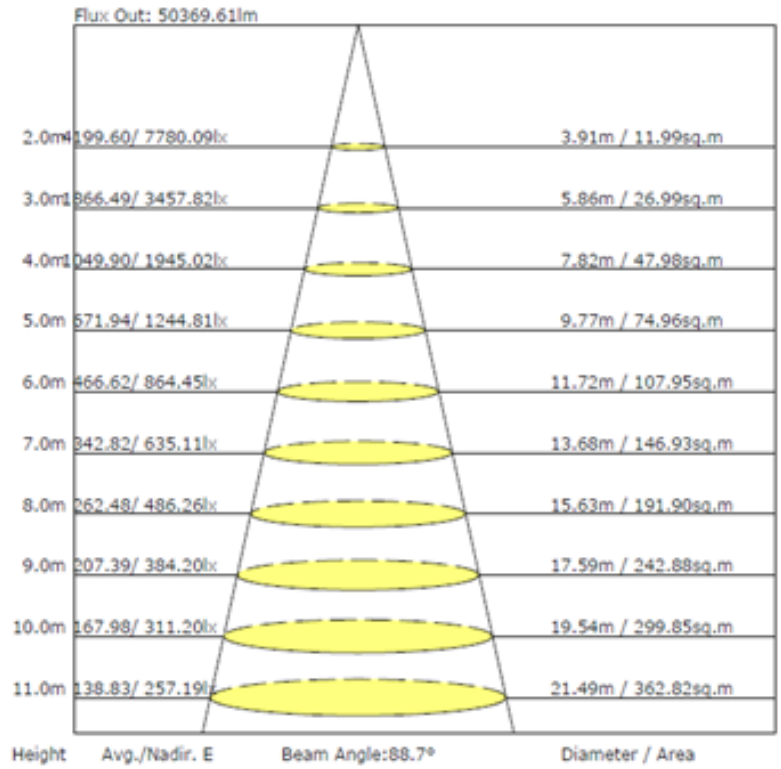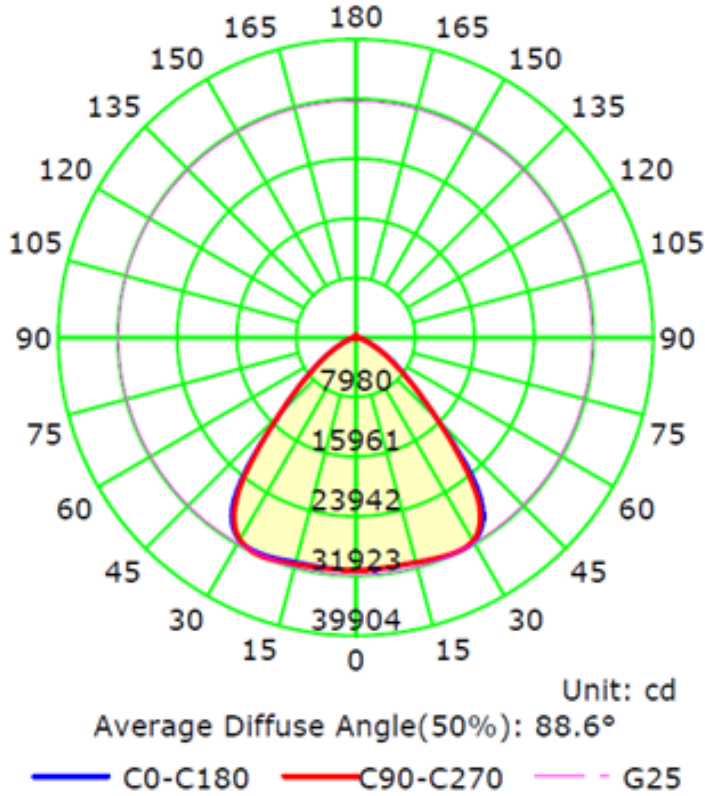




PRODUCT PACKAGING

PACKAGE



Lamp Type	Carton Size	Qty / Carton	Net Weight / Carton	Gross Weight / Carton
	640*540*220mm	1 PC	11KG	13KG

*Tolerance of Carton Size: ± 15 MM, Tolerance of Weight: $\pm 10\%$.


UFO Highbay Light



Put into PE bag

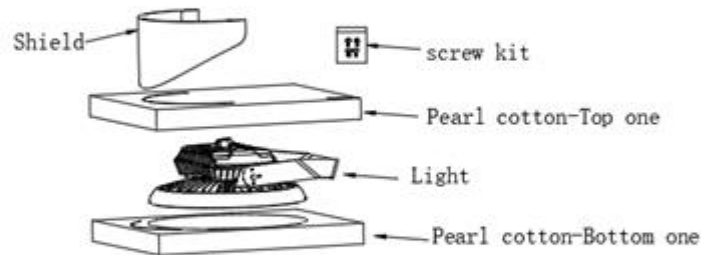

Put into carton box

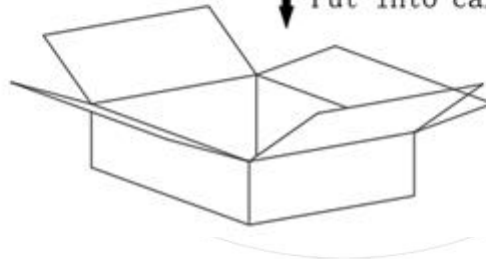

PRODUCT WARNINGS

- ⚡ Please turn off power before install or change assembly parts.
- ⚡ The input voltage and lamps should be matched, after connecting the power line.
- ⚡ Please make sure the wiring section is insulated.
- ⚡ Professionals must install and disassemble the lamps.
- ⚡ Surge is the number 1 cause of LED light failure. Outdoor lights must have surge at fixture, pole, and breaker.
- ⚡ Surge is the number 1 cause of LED light failure. Indoor lights must have surge at fixture and breaker.

PRODUCT TROUBLESHOOTING

Issue	Check points
Light Flickers	Check all wiring for disconnections, shorts and burnt wiring and connections. Confirm steady input voltage to the light fixture, fluctuating input voltage will harm the LED driver and can lead to premature failure. Lights with photocells can have photocell tag from ambient light or light reflecting at the sensor. Simply cover the photocell completely and see if flickering continues while the photocell is covered. Call Tech Support for help if none of the above solves the issue.
Light does not work at all.	Check all wiring for disconnections, shorts and burnt wiring and connections. Confirm steady input voltage to the light fixture, fluctuating input voltage will harm the LED driver and can lead to premature failure. If input voltage is not in the voltage range of the fixture, you will need to find the source of your input voltage issue. Call Tech Support for help if none of the above solves the issue.

For more technical information, install questions, troubleshooting help or warranty claims, we have a dedicated US Tech and Customer Support Team to help solve any issues you have and can be reached by email or phone. If you need help with any of our products, we are here for you so that you are never in the dark!

BETTER LIGHTS. BETTER SUPPORT.



CERTIFIED



LISTED





US based
phone and online
customer support



**5 YEARS
WARRANTY**