


# 26 Watt LED Bollard Light

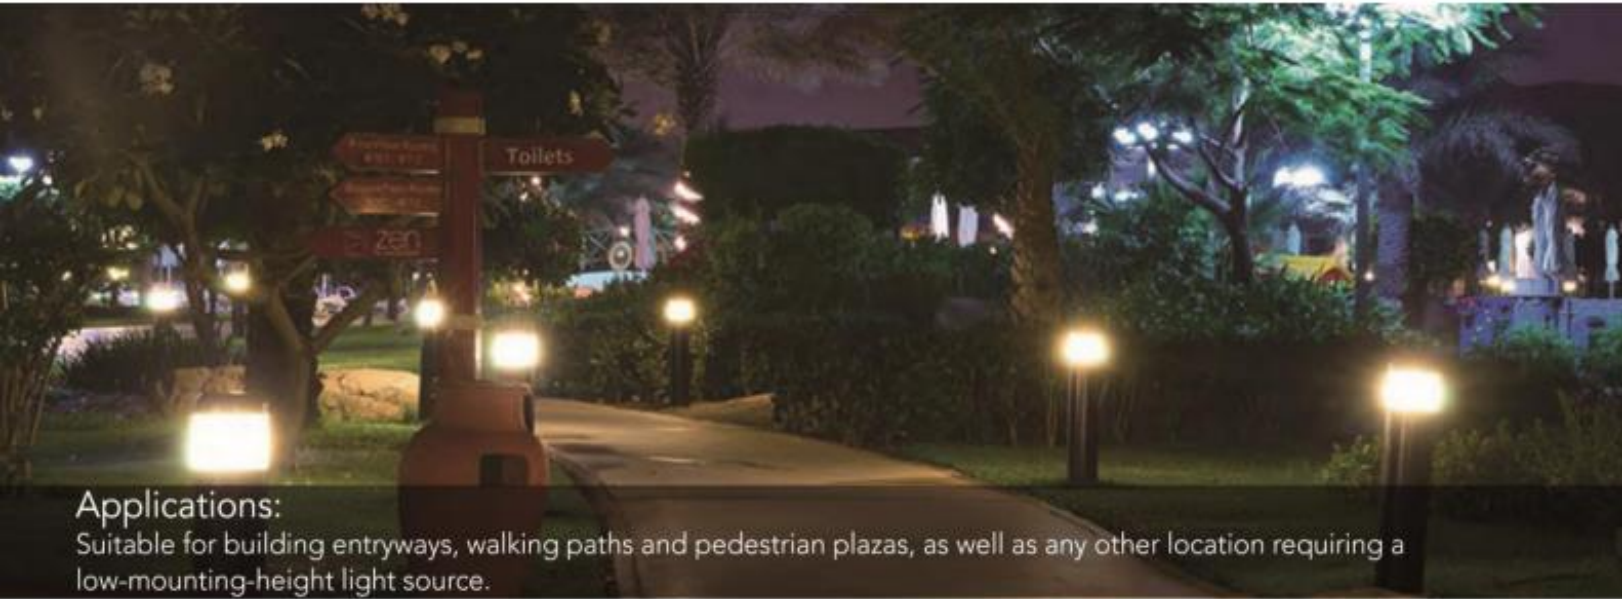


## Applications:

Suitable for building entryways, walking paths and pedestrian plazas, as well as any other location requiring a low-mounting-height light source.

## Features

- Efficacy higher than 115 lm/W with zero uplight while consumes 26W.
- Round appearance for good decorative effect, sized in 3.5ft height.
- Dark bronze polyester powder-coat finish.
- 360 degrees surround illumination with 80 CRI.
- 1-10V dimming and projected over 50,000 hrs life span.
- Operating temperature is -40°C to 40°C (-40°F to 113°F).
- Optional emergency function for emergency needs.
- Robust ground cage pre-buried installation.
- UL/cUL wet location listed and DLC qualified.

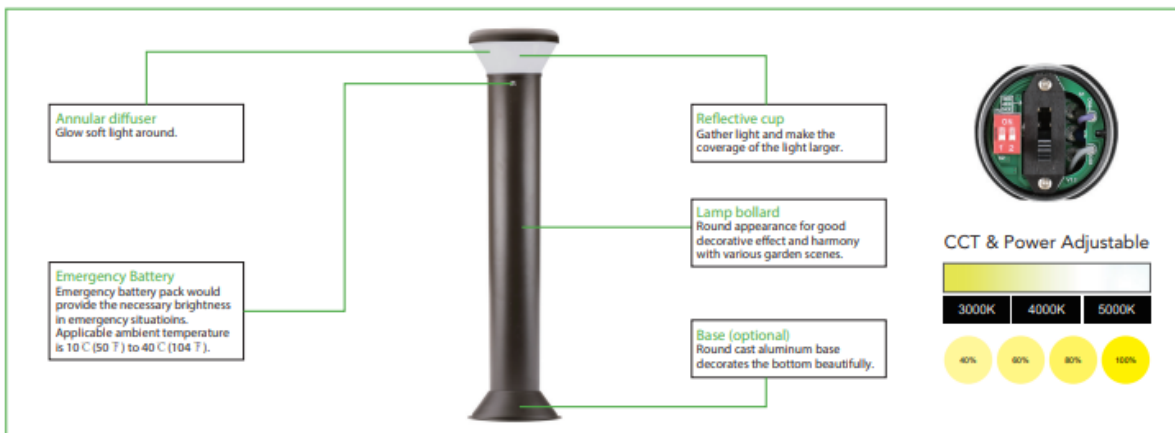

## PERFORMANCE DATA

SYSTEM WATTS	VOLTAGE	3000K(CRI70)		4000K(CRI80)		5000K(CRI80)	
		LUMENS	LPW	LUMENS	LPW	LUMENS	LPW
26W	120-277V	2800lm	110lm/W	3000lm	115lm/W	3100lm	119lm/W

## ELECTRICAL DATA

Number Of Drivers	Driver Current (mA)	Nominal Power (W)	INPUT VOLTAGE (V)	CURRENT (Amps)
1	670	26	120	0.22
		26	208	0.13
		26	240	0.11
		26	277	0.09

## DIMENSION

unit: inch/mm

Net Weight:  
26W:12.136 lbs

