
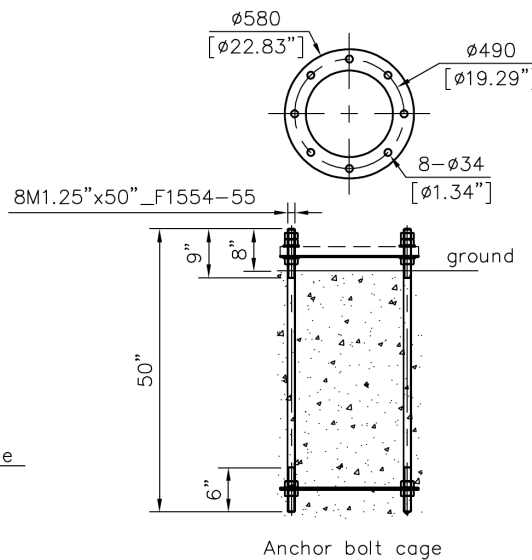





12	L20001083-1-A
QTY	QUOTATION #

Notes:


1. Material:
 Pole shaft: ASTM A572 GR65
 Baseplate: ASTM A572 GR50 or Q355
 Anchor bolt: M1.25" _F1554-55
2. Design wind speed: 115mph Vult
3. Pole is round
4. Finished: Galvanizing per ASTM A123

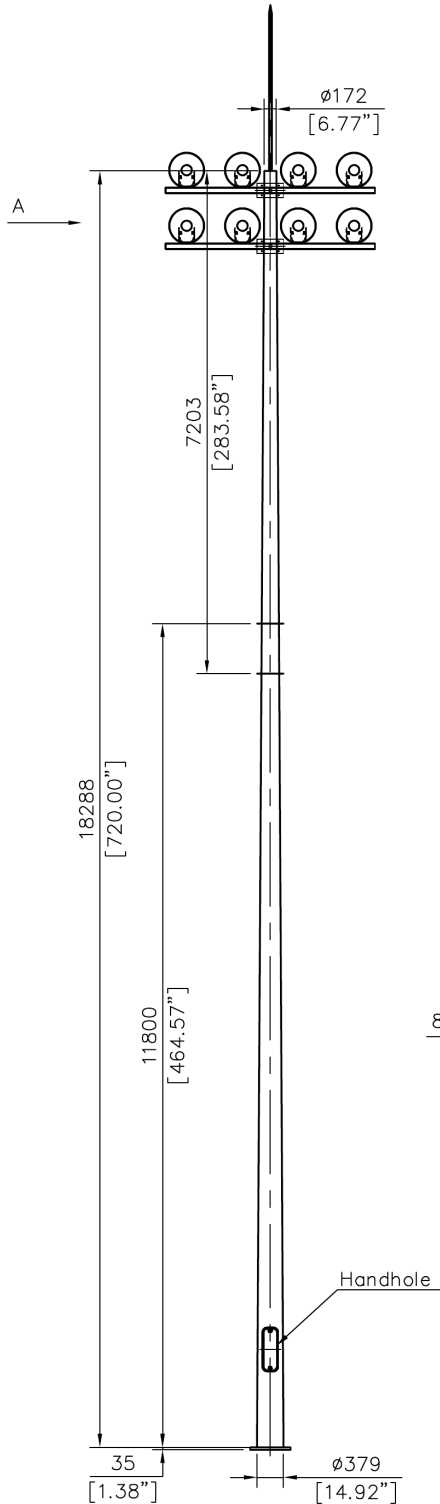

				RuggedGrade www.ruggedgrade.com 888-953-2476			
CLIENT				60ft-L8-FP			
TITLE							
DRAWN		MWY	2026/1/12	MATERIAL		MANUFACTURING ORDER	
ENGR		MWY	2026/1/12	THK(mm)			
CHECKED		WZL	2026/1/12	WT(kg)		VERSION: A	
REV ID	DATE	REVISION DESCRIPTION		SPECIFICATIONS	SCALE		

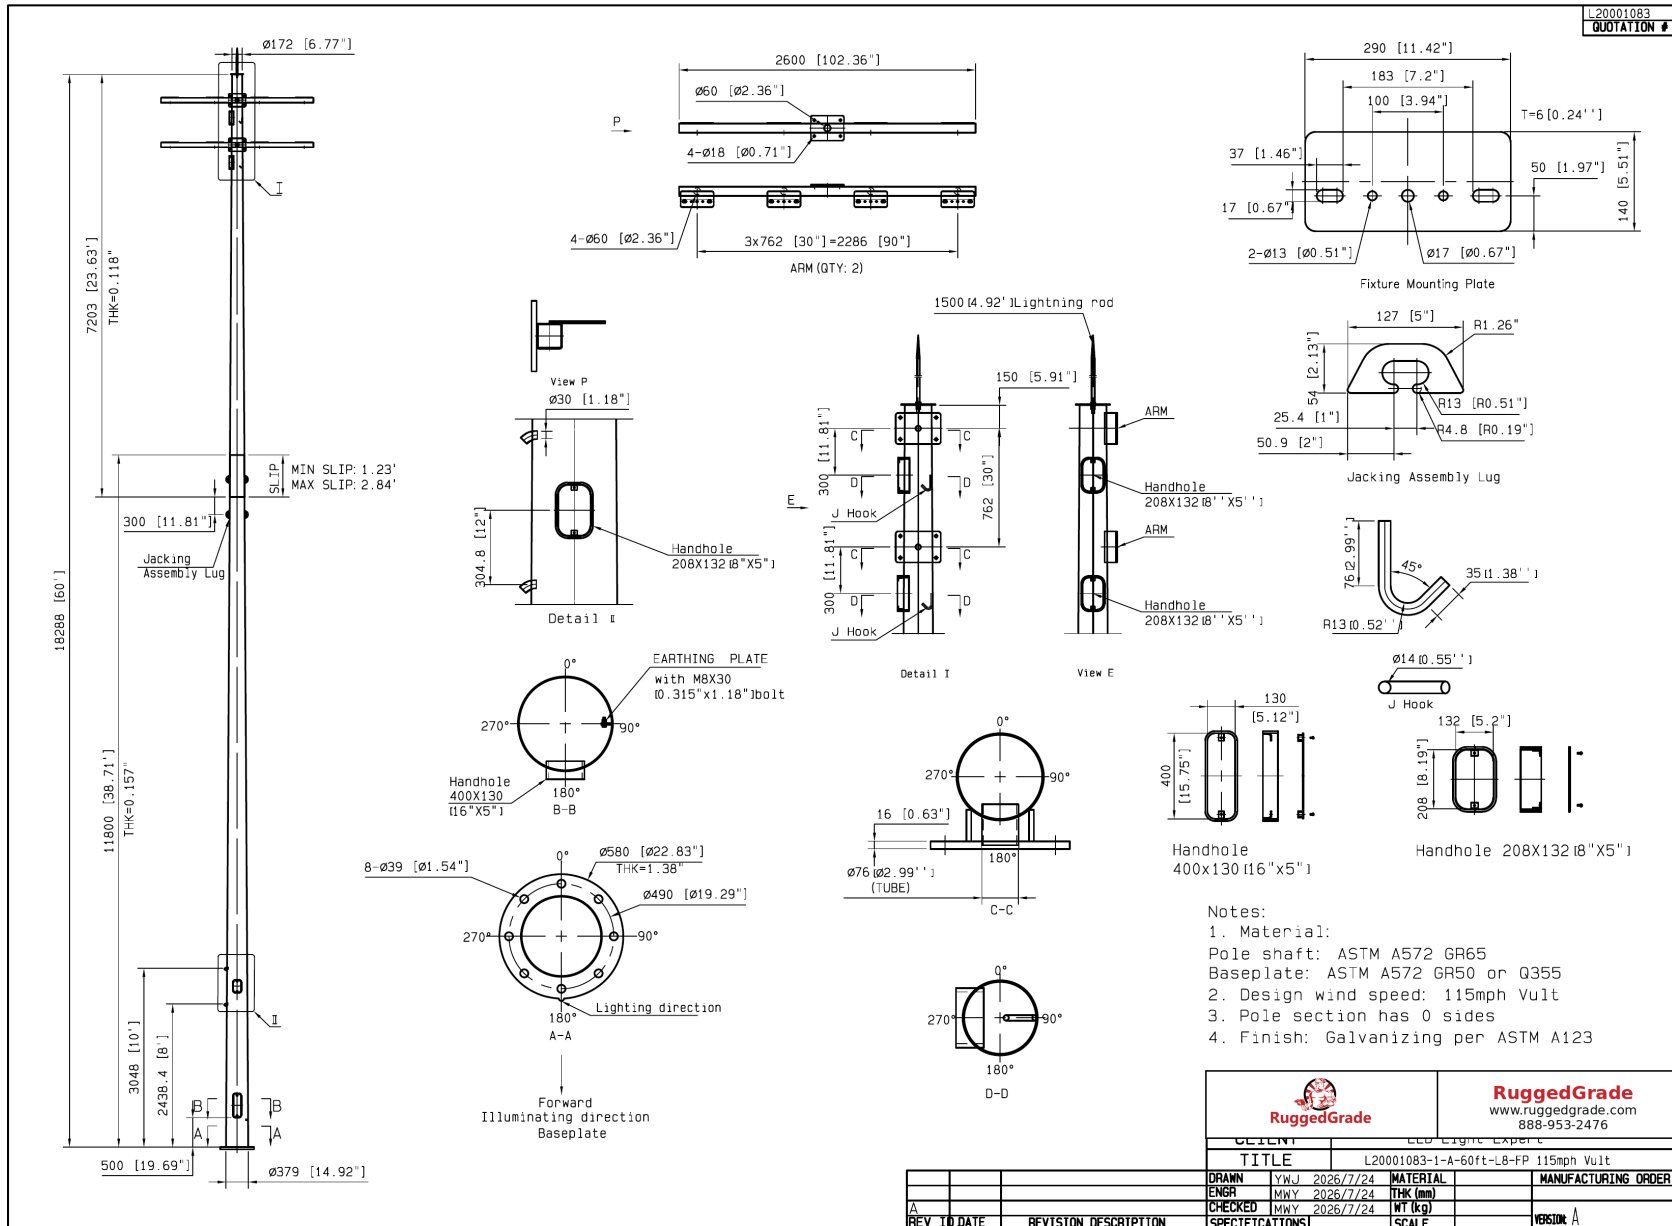


L20001083	12
QUOTATION #	QTY:

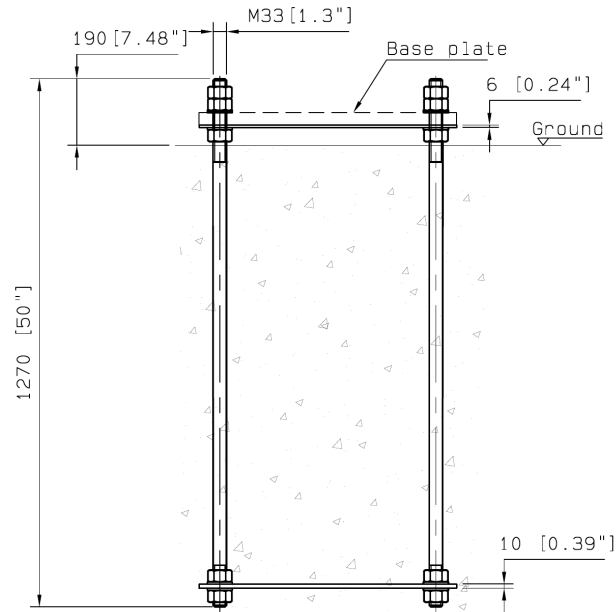

NOTES:

- (1) MAKE SURE THE TEMPLATE IS HORIZONTAL BEFORE POLE INSTALLATION
- (2) REMOVE THE TOP TEMPLATE AND LET THE BASE PLATE SIT ON THE NUTS DIRECTLY WHILE INSTALLING POLE
- (3) ALL THE ANCHOR BOLTS AND TEMPLATE ARE GALVANIZED
- (4) ANCHOR BOLT TO BE PROVIDED UNASSEMBLED AND INSTALLED ON-SITE.
- (5) MATERIAL:
 ANCHOR BOLT: F1554-07a M33[1.3"]

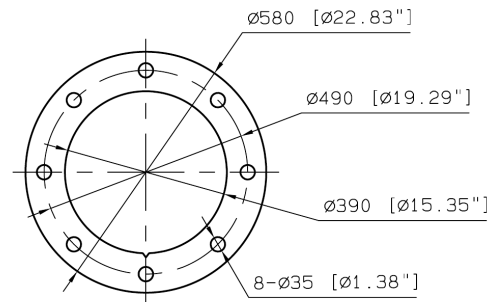

TEMPLATE DETAIL

		RuggedGrade www.ruggedgrade.com 888-953-2476	
CLIENT		LED Light Expert	
TITLE		Anchor Bolt cage for 60ft-L8-L12-FP 115mph Vult	
DRAWN	YWJ	2026/7/22	MATERIAL
ENGR	MWY	2026/7/22	THK (mm)
CHECKED	MWY	2026/7/22	WT (kg)
REV	ID	DATE	REVISION DESCRIPTION
SPECIFICATIONS		SCALE	P/N