

Our Lady Of Fatima Church San Clemente California

New pole lights in front, 6 new building lights, 2 solar


Partner for Contact:
Order No.:
Company: LEDLightExpert.com
Customer No.:

Date: 08 / 26 / 2022
Operator: LEDLightExpert.com

Our Lady Of Fatima Church San Clemente California / Luminaire parts list


2 Pieces FL06-50W
Article No.:
Luminous flux (Luminaire): 6843 lm
Luminous flux (Lamps): 6843 lm
Luminaire Wattage: 50.9 W
Luminaire classification according to CIE: 100
CIE flux code: 52 86 99 100 100
Fitting: 1 x User defined (Correction Factor 1.000).

See our luminaire catalog for an image of the luminaire.




2 Pieces SB07N-300W
Article No.: SB07N-300W
Luminous flux (Luminaire): 41065 lm
Luminous flux (Lamps): 41065 lm
Luminaire Wattage: 302.9 W
Luminaire classification according to CIE: 100
CIE flux code: 34 66 91 100 100
Fitting: 1 x User defined (Correction Factor 1.000).

See our luminaire catalog for an image of the luminaire.




12 Pieces SB07N-150W
Article No.:
Luminous flux (Luminaire): 21984 lm
Luminous flux (Lamps): 21985 lm
Luminaire Wattage: 152.9 W
Luminaire classification according to CIE: 99
CIE flux code: 34 66 90 99 100
Fitting: 1 x User defined (Correction Factor 1.000).

See our luminaire catalog for an image of the luminaire.



Exterior Scene 1 / Luminaires (coordinates list)**FL06-50W**

6843 lm, 50.9 W, 1 x 1 x User defined (Correction Factor 1.000).

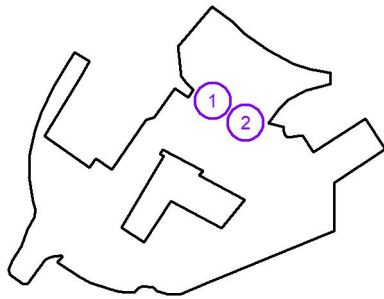


No.	Position [ft]			Rotation [°]		
	X	Y	Z	X	Y	Z
1	314.301	310.036	20.000	0.0	0.0	42.0
2	370.402	272.963	20.000	0.0	0.0	42.0

LEDLightExpert.com

Operator LEDLightExpert.com
Telephone 800-674-9420
Fax
e-Mail

Exterior Scene 1 / Luminaires (coordinates list)**SB07N-300W**

41065 lm, 302.9 W, 1 x 1 x User defined (Correction Factor 1.000).

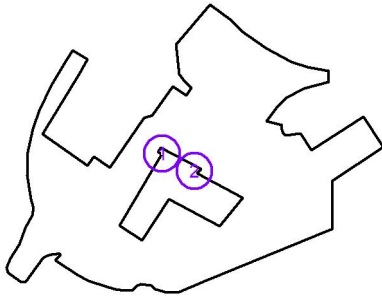

No.	Position [ft]			Rotation [°]		
	X	Y	Z	X	Y	Z
1	231.693	217.243	20.000	0.0	-45.0	65.0
2	286.742	187.990	20.000	0.0	-45.0	65.0


LEDLightExpert.com

Operator LEDLightExpert.com
 Telephone 800-674-9420
 Fax
 e-Mail

Exterior Scene 1 / Luminaires (coordinates list)

SB07N-150W


21984 lm, 152.9 W, 1 x 1 x User defined (Correction Factor 1.000).

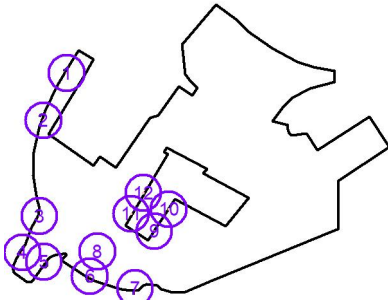

No.	Position [ft]			Rotation [°]		
	X	Y	Z	X	Y	Z
1	59.301	353.589	18.000	0.0	-30.0	-40.0
2	19.649	273.422	18.000	0.0	-30.0	-30.0
3	12.845	111.450	18.000	0.0	-30.0	-25.0
4	-16.484	49.585	18.000	0.0	-30.0	-40.0
5	20.535	33.849	18.000	0.0	-30.0	135.0
6	98.774	9.251	18.000	0.0	-30.0	65.0
7	175.427	-11.282	18.000	0.0	-30.0	100.0
8	111.236	51.052	18.000	0.0	-30.0	-130.0
9	208.308	85.516	20.000	0.0	-50.0	-35.3
10	232.827	122.898	20.000	0.0	-50.0	-35.3
11	169.003	115.199	20.000	0.0	-50.0	145.2
12	189.630	150.261	20.000	0.0	-50.0	152.1




Exterior Scene 1 / 3D Rendering

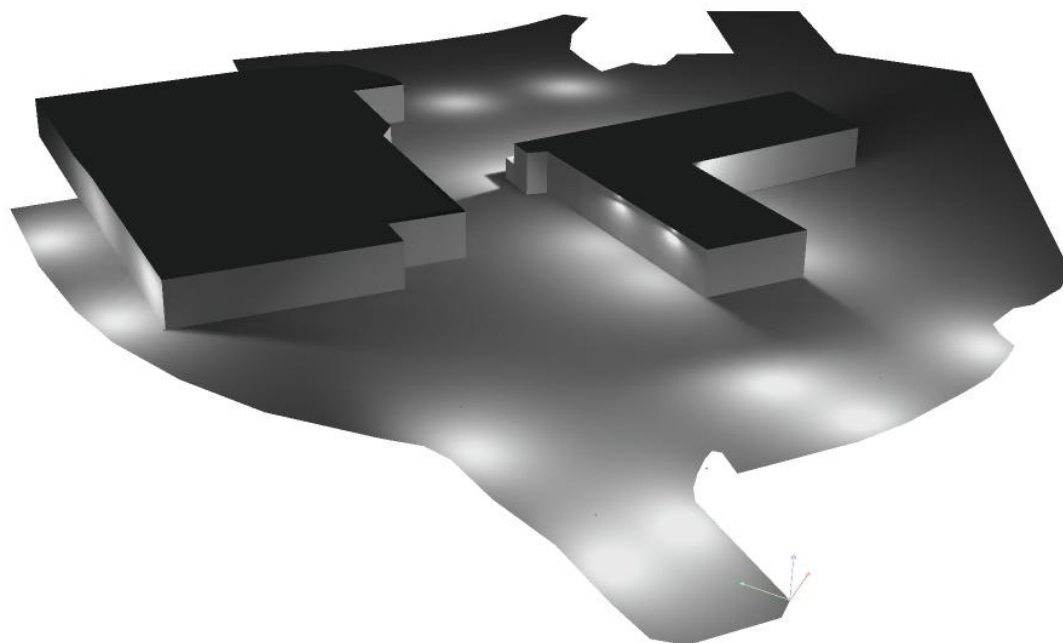



Exterior Scene 1 / False Color Rendering

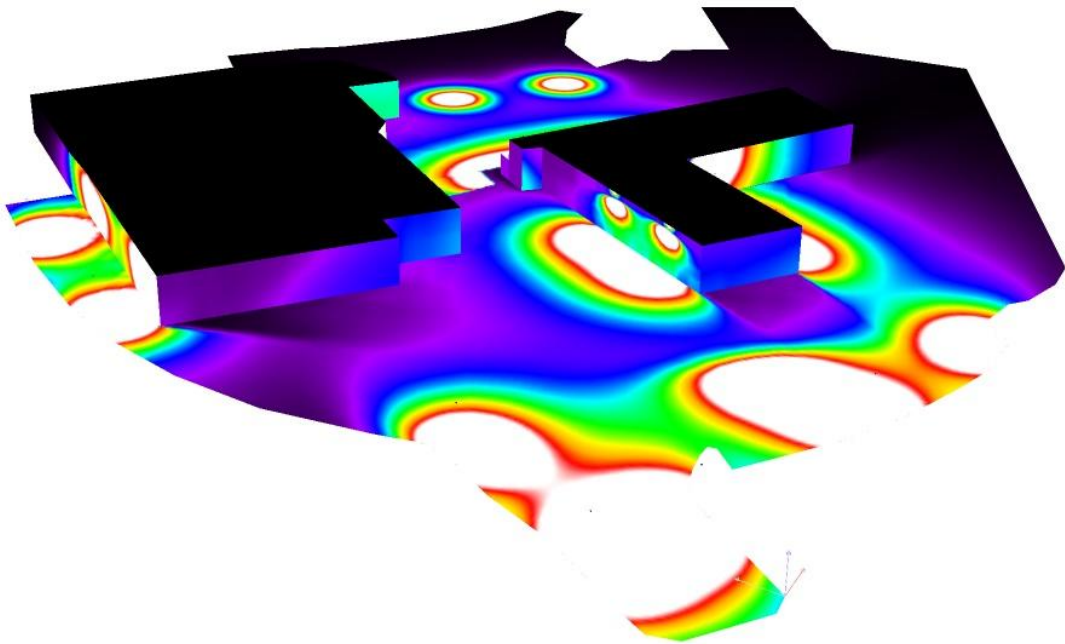


0 0.50 1.00 1.50 2.00 2.50 3.00 3.50 4.00

fc

LEDLightExpert.com

Operator LEDLightExpert.com
 Telephone 800-674-9420
 Fax
 e-Mail

Exterior Scene 1 / Ground Element 1 / Surface 1 / Isolines (E)

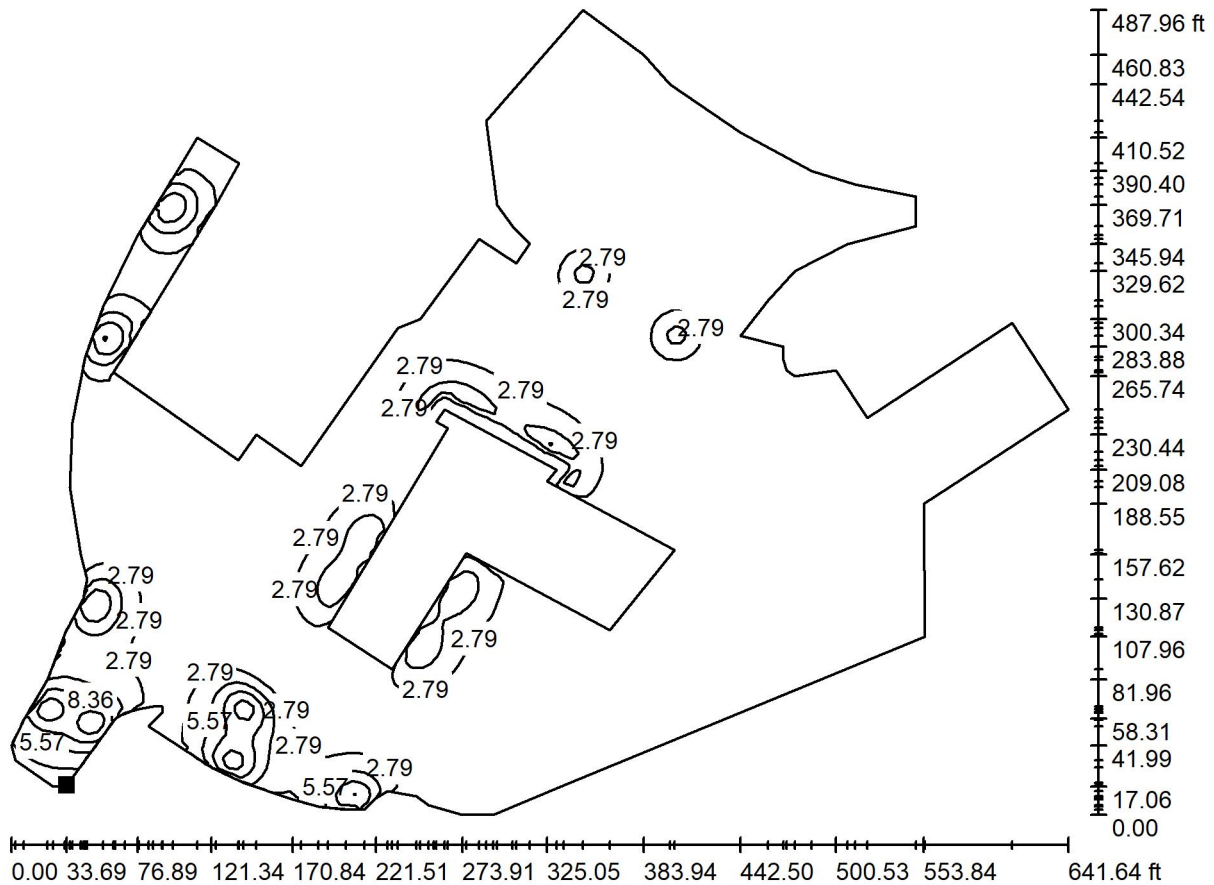


Values in Footcandles, Scale 1 : 1399

Position of surface in external scene:

Marked point:

(0.000 ft, 0.000 ft, 0.000 ft)



Grid: 128 x 128 Points

E_{av} [fc]
1.39

E_{min} [fc]
0.00

E_{max} [fc]
13


u_0
0.000

E_{min} / E_{max}
0.000

LEDLightExpert.com

Operator LEDLightExpert.com
 Telephone 800-674-9420
 Fax
 e-Mail

Exterior Scene 1 / Ground Element 1 / Surface 1 / Value Chart (E)

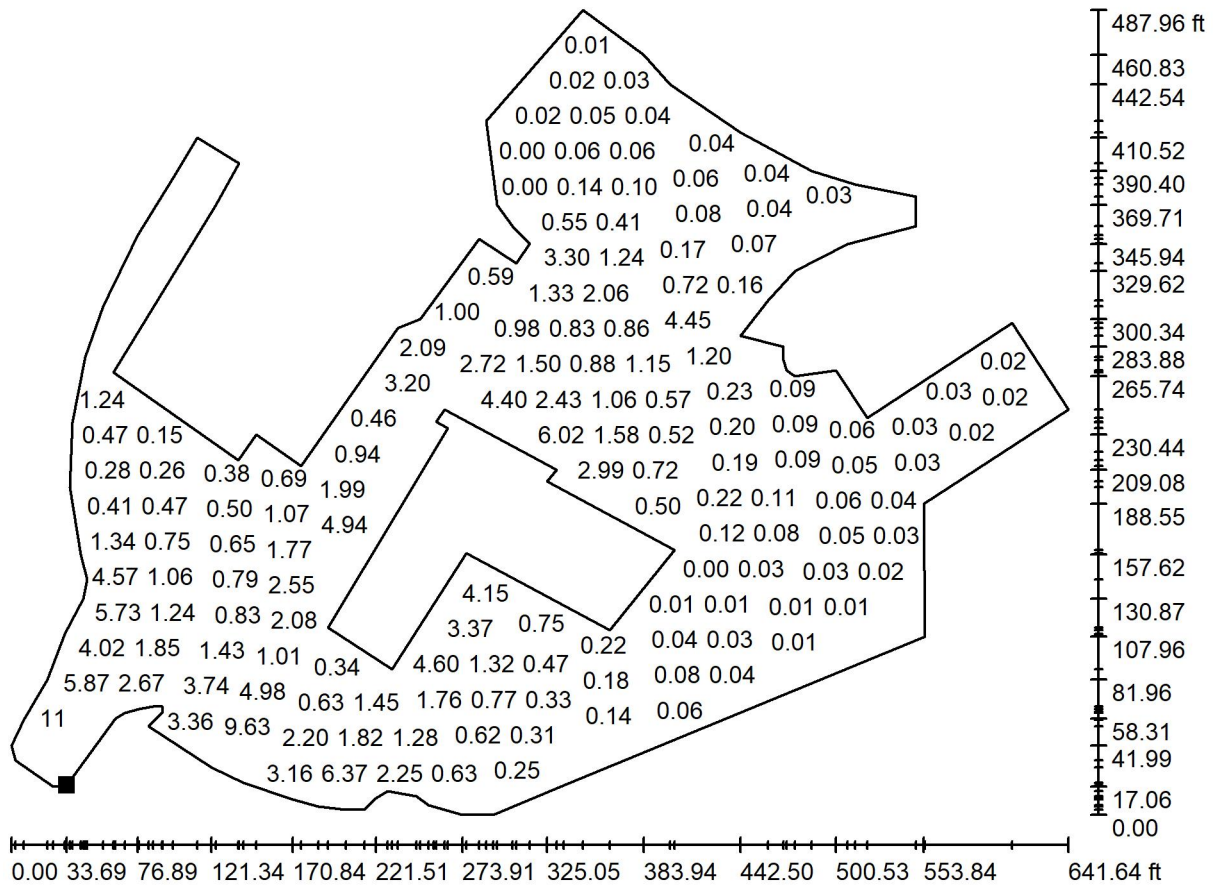


Not all calculated values could be displayed.

Position of surface in external scene:

Marked point:

(0.000 ft, 0.000 ft, 0.000 ft)



Grid: 128 x 128 Points

E_{av} [fc]
1.39

E_{min} [fc]
0.00

E_{max} [fc]
13

u_0
0.000

E_{min} / E_{max}
0.000